APPROX. WEIGHT (LBS)
321

ECO No	DESCRIPTION	REV BY	DATE

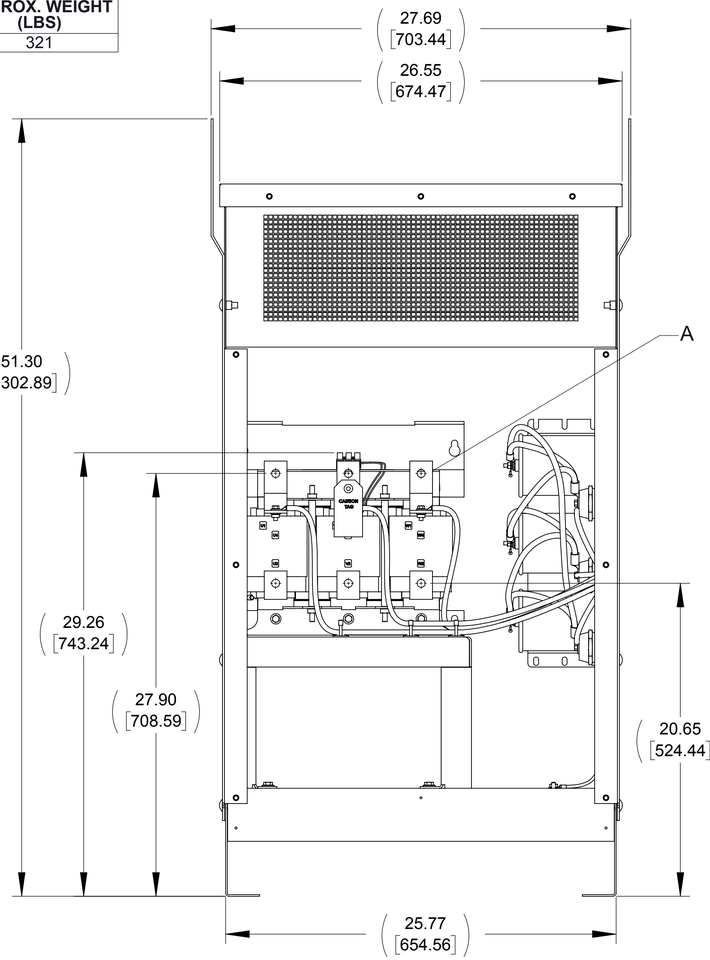

FRONT VIEW
(PANELS REMOVED)

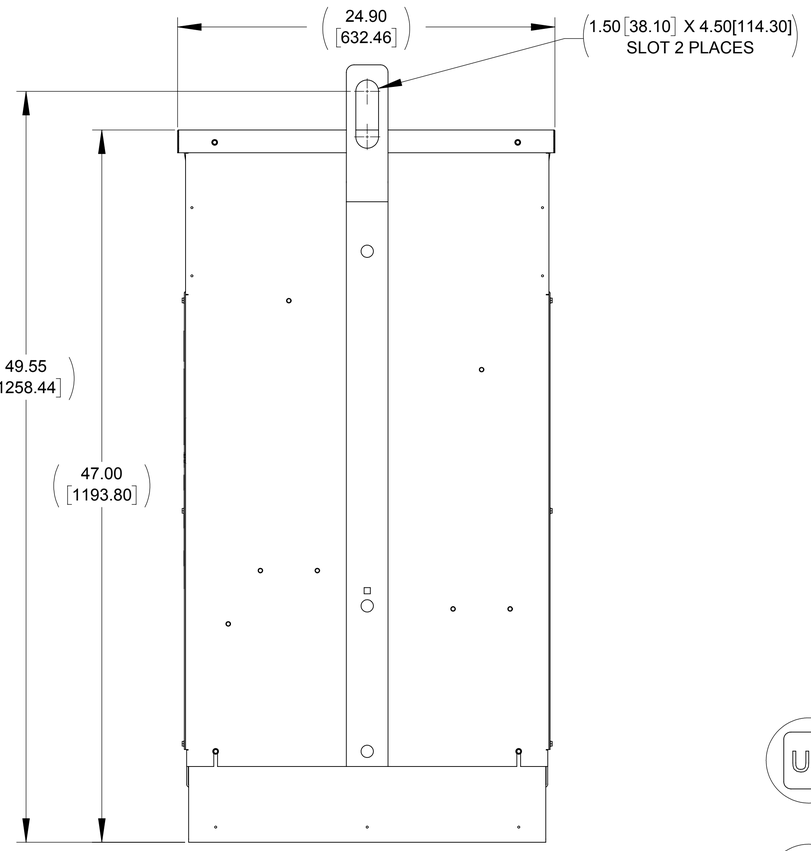

SIDE VIEW

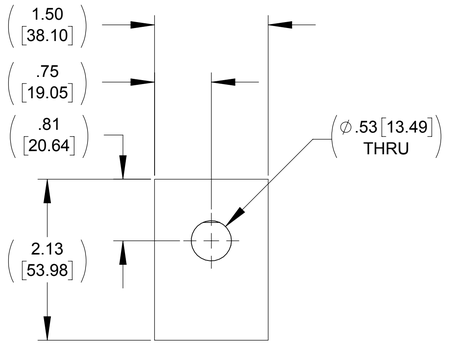

DETAIL A
(6 PLACES)



DETAIL B
CUSTOMER CONNECTION
DETAIL VIEW (THERMAL)

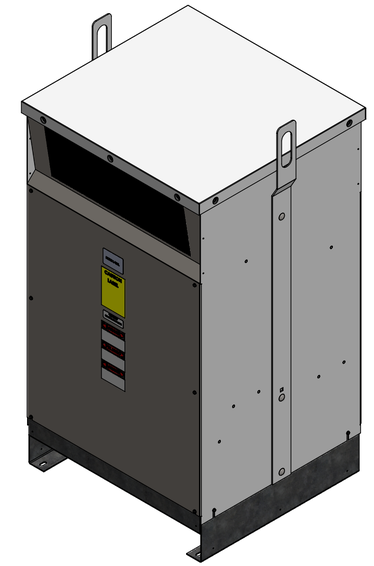

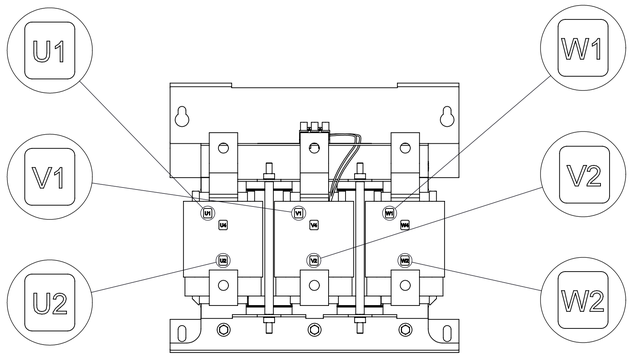

CUSTOMER CONNECTION
DETAIL VIEW

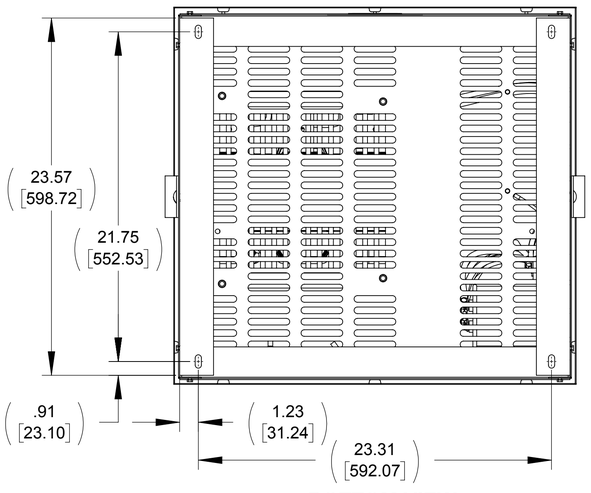

BOTTOM VIEW

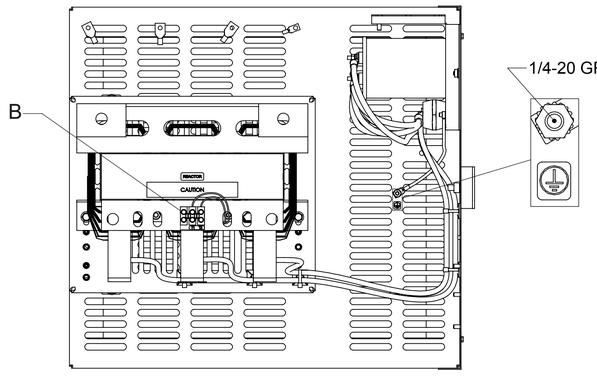

TOP VIEW
(PANELS REMOVED)

NOTES:

1. TERMINAL WIRE RANGE: 4-14 AWG.
2. TERMINAL SCREW TIGHTENING TORQUE: 16 IN\LBS.
3. REFER TO USER MANUAL FOR COMPLETE INSTALLATION INSTRUCTIONS.

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU(EUROPEAN UNION) DIRECTIVE RoHS2

CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE:

ANGLES: ± 1 °

1 PLACE .X: ± .1 [2.5]

2 PLACE .XX: ± .03 [0.76]

3 PLACE .XXX: ± .010 [0.254]

MTE
POWER QUALITY. SOLVED.

N83 W13330 Leon Road
Menomonee Falls, WI 53051 USA
800.455-4683
262.253.8200

MATERIAL

DRAWN	DATE
JD	08/01/19
CHECKED	DATE
CH	11/08/19
APPROVED	DATE
PY	11/14/19

CONFIDENTIAL AND PROPRIETARY INFORMATION
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION

DESCRIPTION

SWG 320A 208-240V 2-8kHz
FILTER, NEMA 1/2 ENCL

SIZE	DWG No.	REV
D	CD SWGG0320A	00

SCALE 1:5 SHEET 1 OF 1