


APPROX. WEIGHT
(LBS)
31



ECO No	DESCRIPTION	REV BY	DATE

D

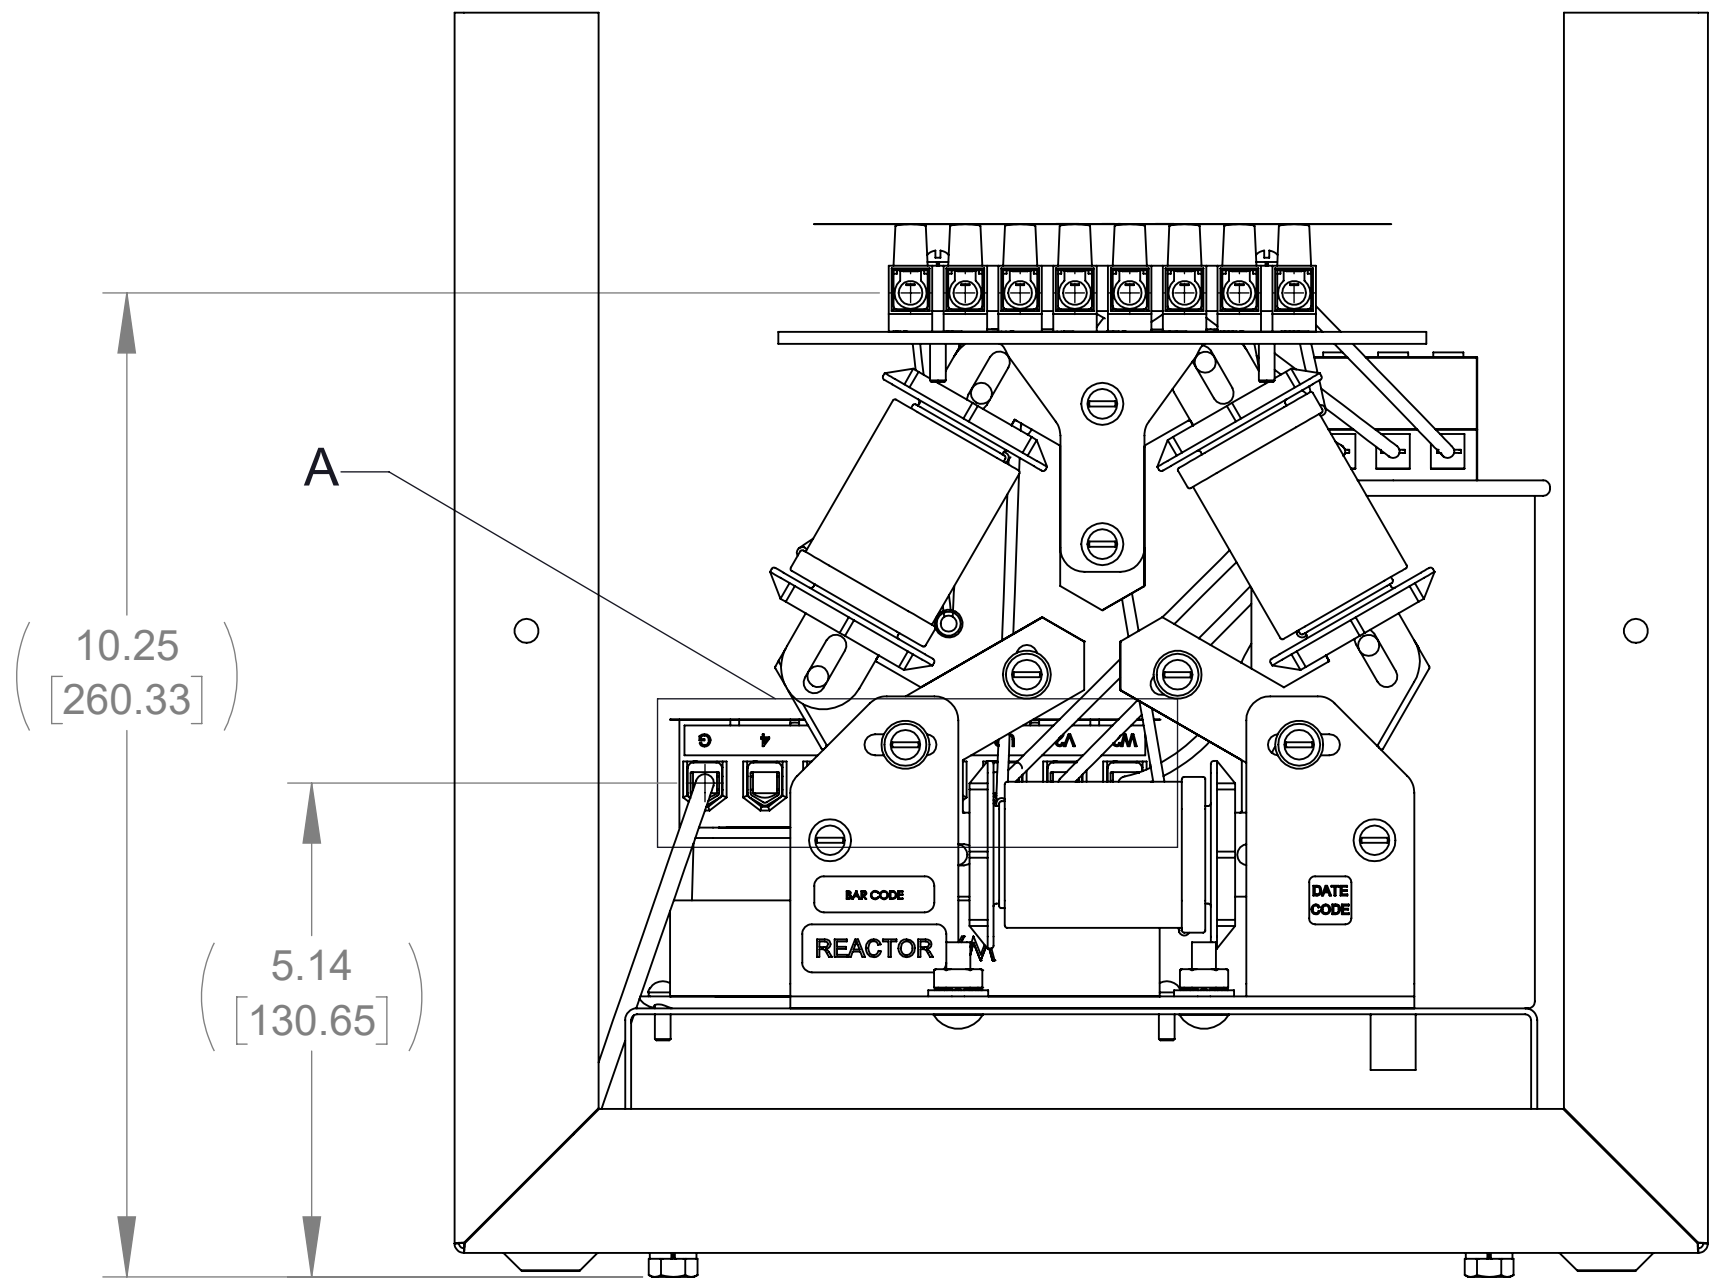


FRONT VIEW
(PANELS REMOVED)

SIDE VIEW

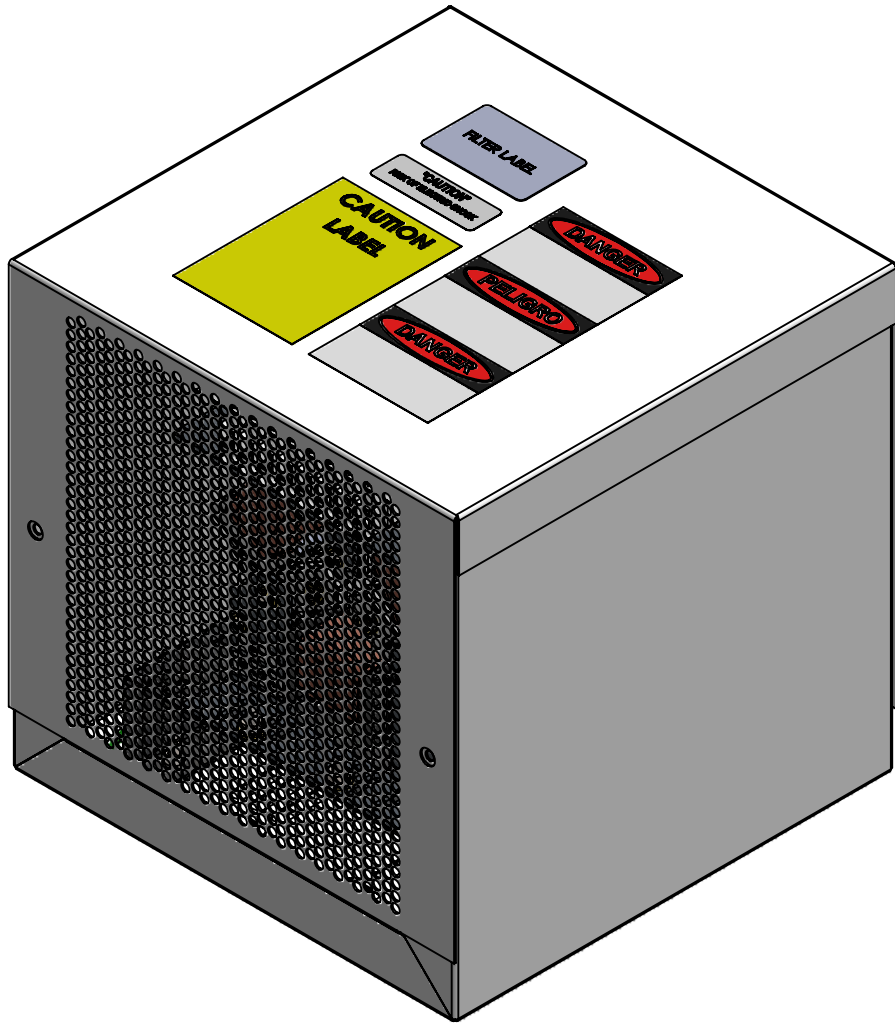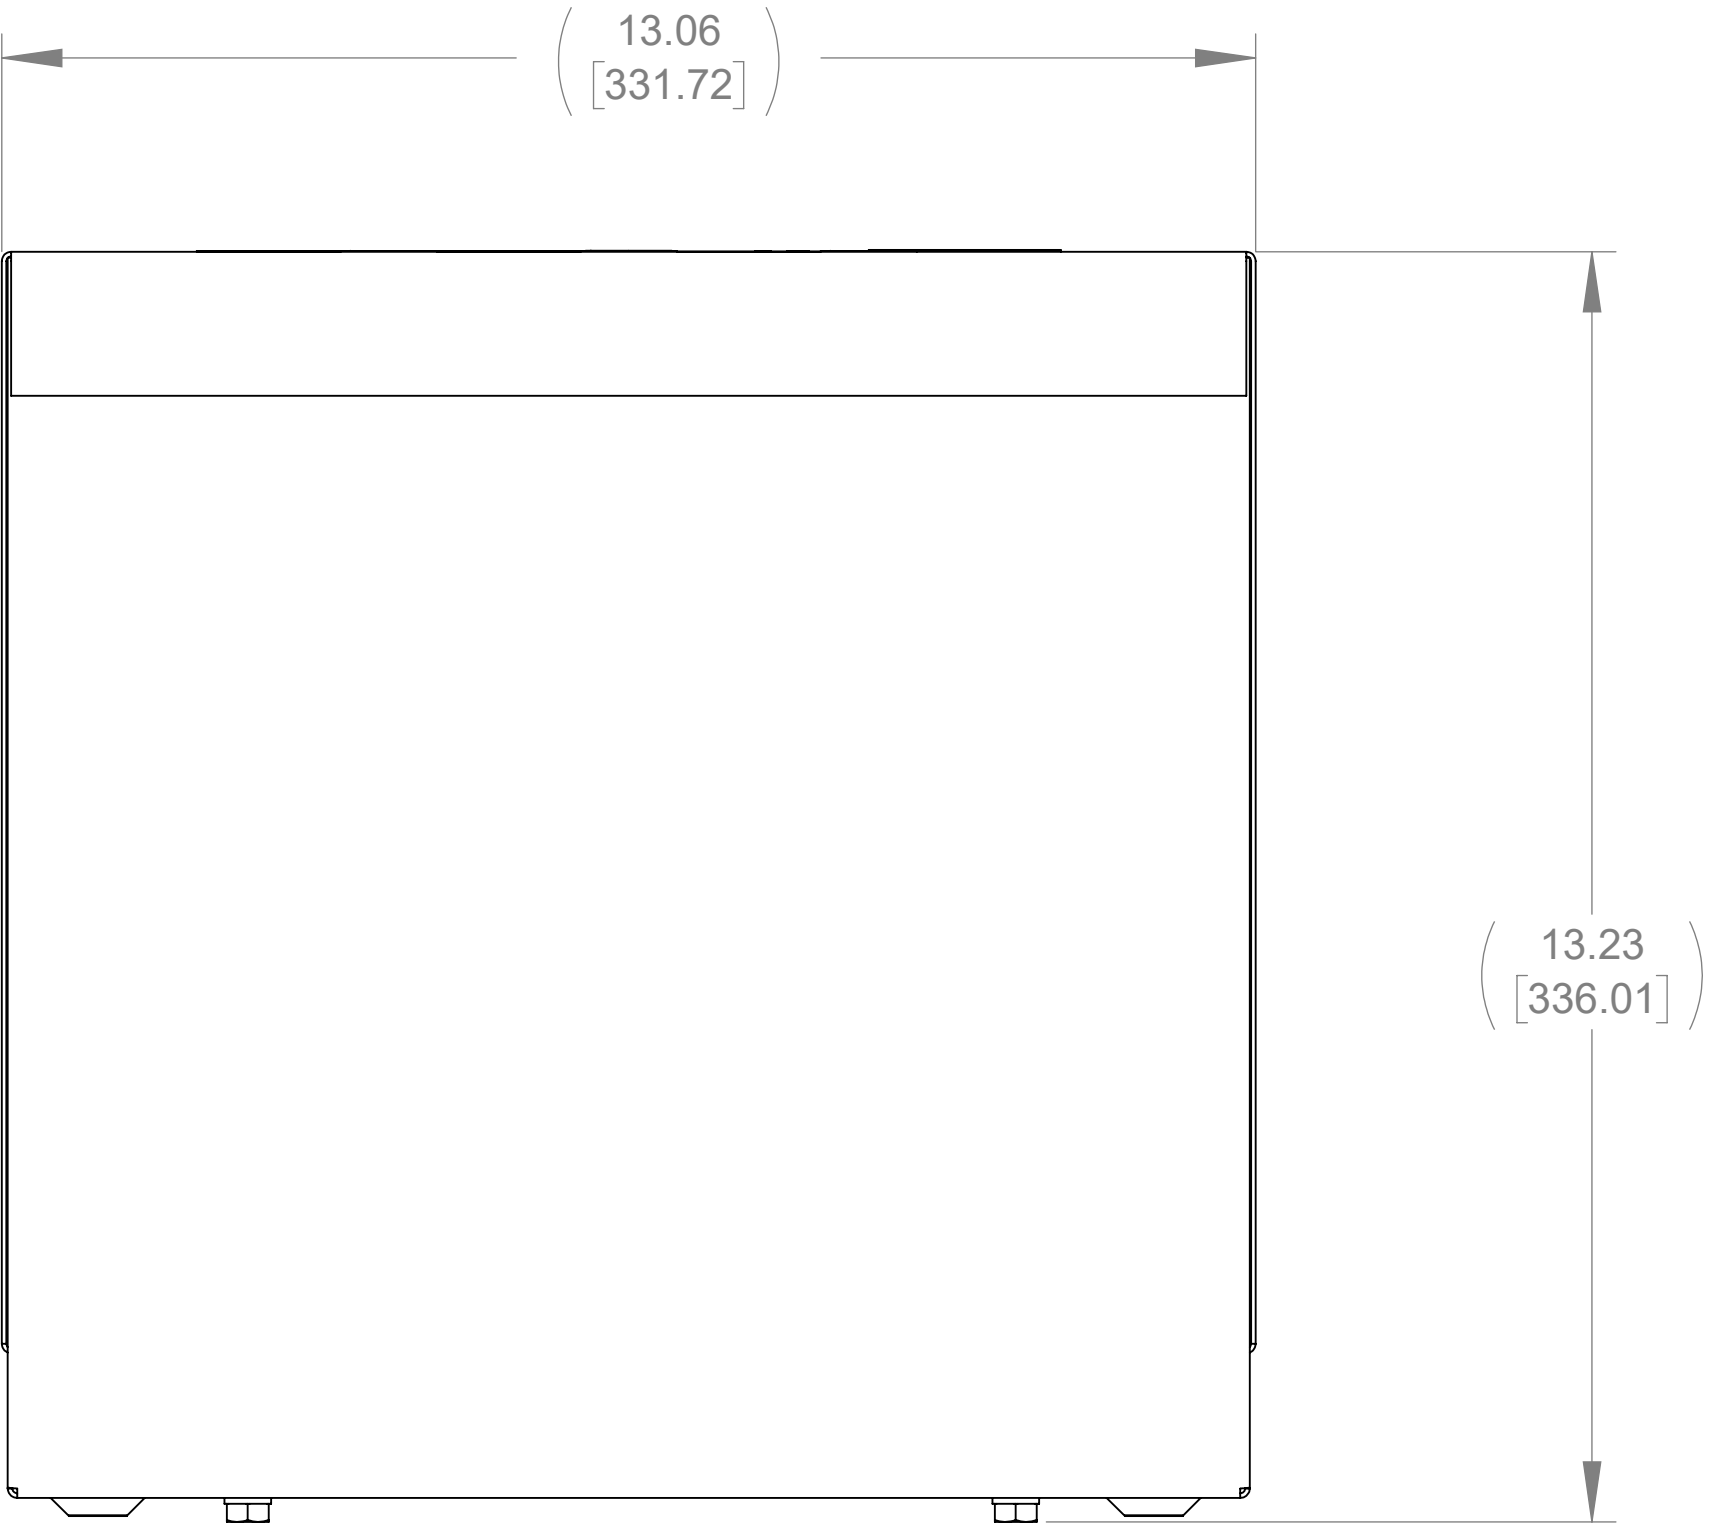

D


C

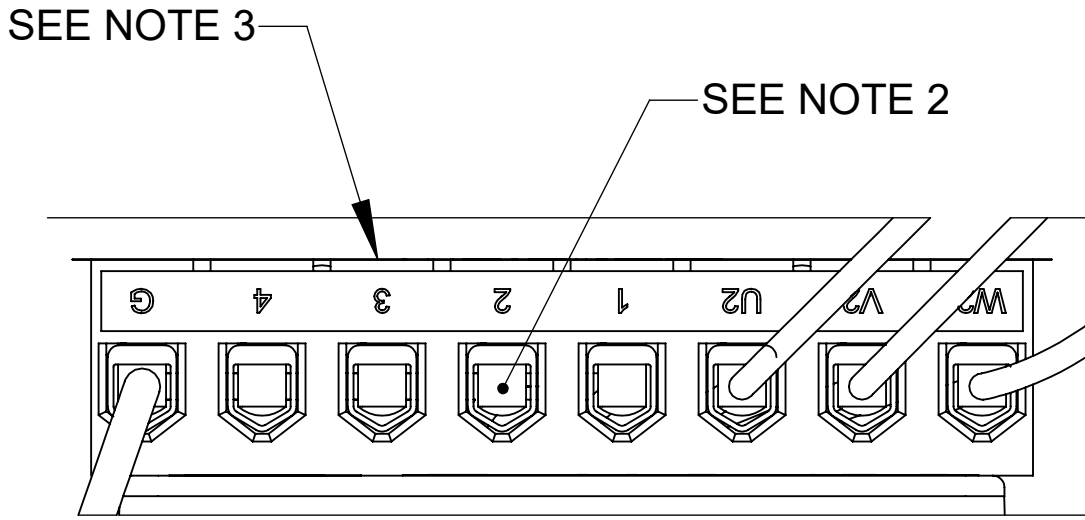

DETAIL A
CUSTOMER CONNECTION
DETAIL VIEW
(COMMON MODE BOX)



C

B

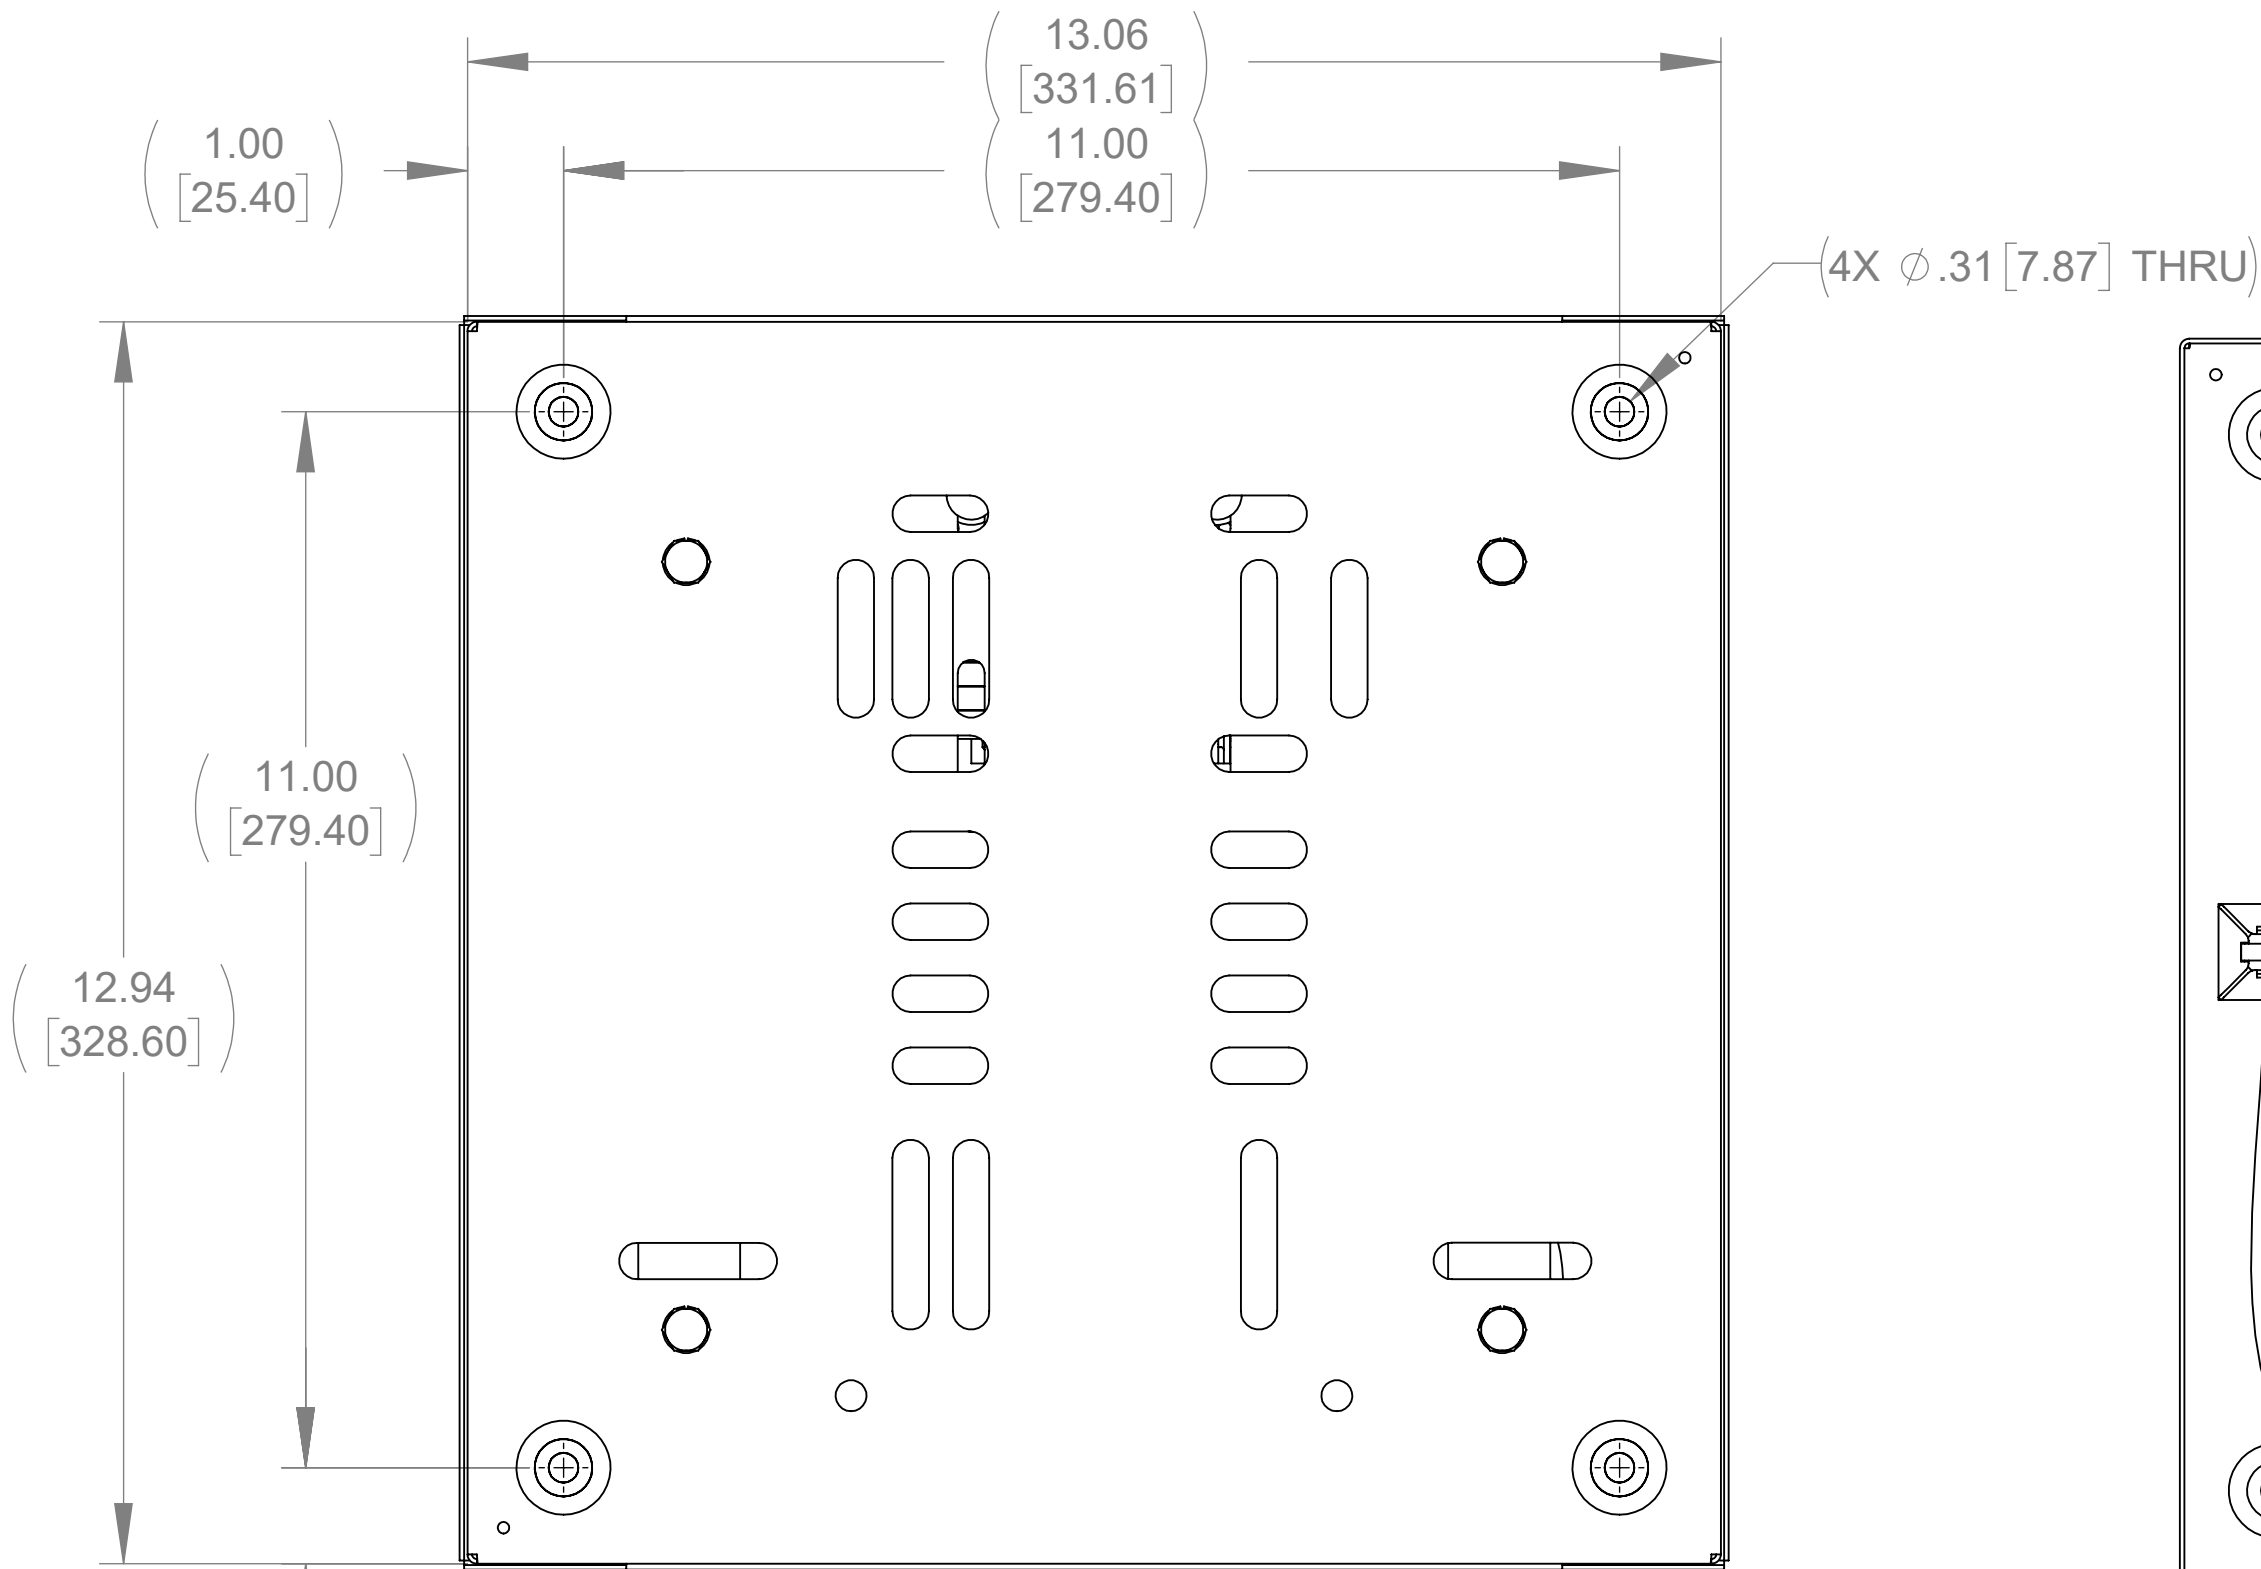


BOTTOM VIEW

10-24 GROUND STUD

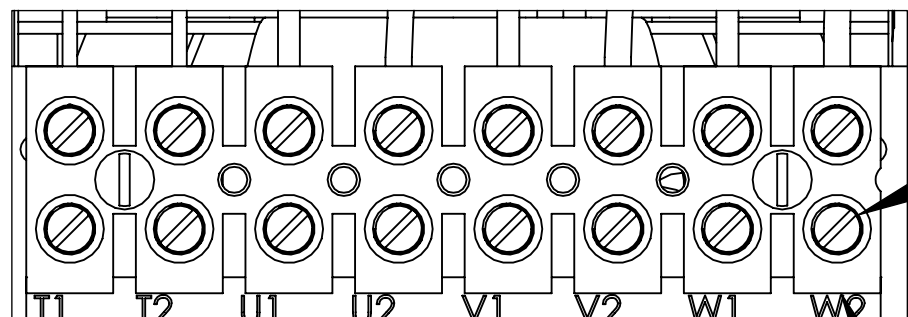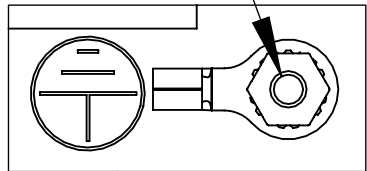

DETAIL B
CUSTOMER CONNECTION
DETAIL VIEW
(REACTOR)

B

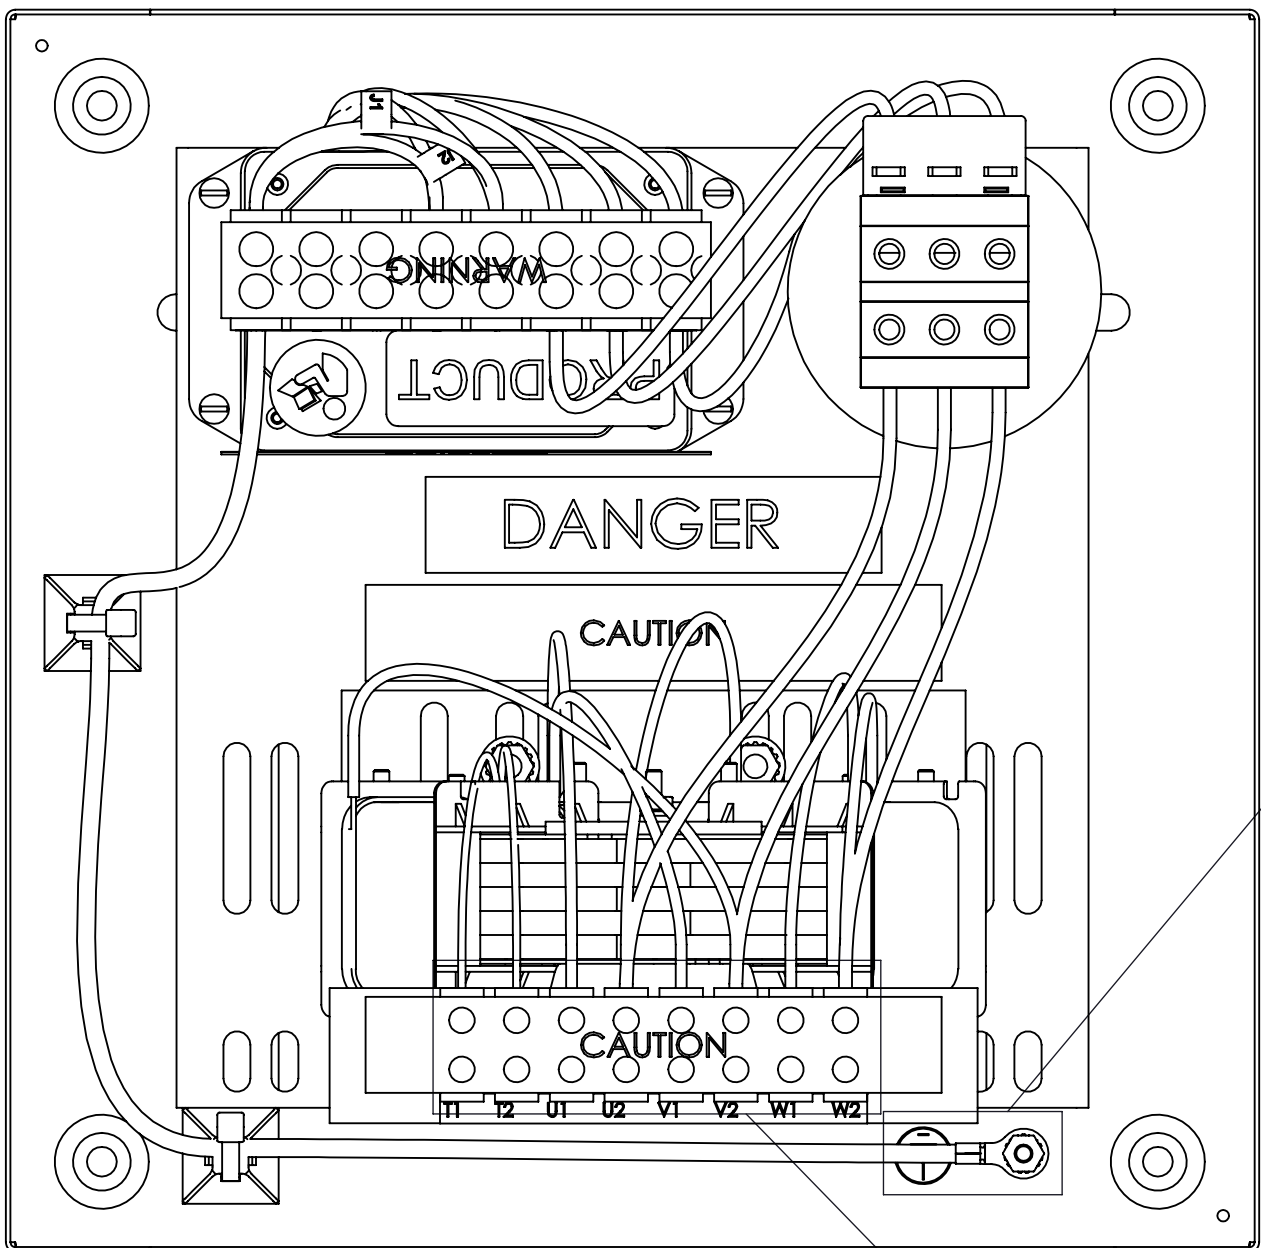

TOP VIEW
(PANELS REMOVED)

B

NOTES:

1. TERMINAL WIRE RANGE: 4-14 AWG.
2. TERMINAL WIRE RANGE: 4-18 AWG.
3. TERMINAL SCREW TIGHTENING TORQUE: 16 IN/LBS.
4. REFER TO USER MANUAL FOR COMPLETE INSTALLATION INSTRUCTIONS.

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU(EUROPEAN UNION) DIRECTIVE RoHS2		MATERIAL		CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION	
CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION				DESCRIPTION	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE: ANGLES: ± 1 ° 1 PLACE .X: ± .1 [2.5] 2 PLACE .XX: ± .03 [0.76] 3 PLACE .XXX: ± .010 [0.254]		MTE POWER QUALITY. SOLVED. N83 W13330 Leon Road Menomonee Falls, WI 53051 USA 800.455-4683 262.253-8200		SINEWAVE NEXUS FILTER 3A, 480V, 60Hz NEMA 1/2 ENCL	
DRAWN MN		DATE 01/27/20		SIZE D	DWG No. CD SWNG0003D
CHECKED MN		DATE 01/27/20		SCALE 1:2	REV 00
APPROVED RH		DATE 03/02/20		SHEET 1 OF 1	

A

8

7

6

5

4

3

2

1