

APPROX. WEIGHT
(LBS)
385


| ECO No | DESCRIPTION | REV BY | DATE |
|--------|-------------------------|--------|----------|
| M12062 | UPDATE COMMON MODE ASSY | MN | 10/24/19 |

D


C

B


A

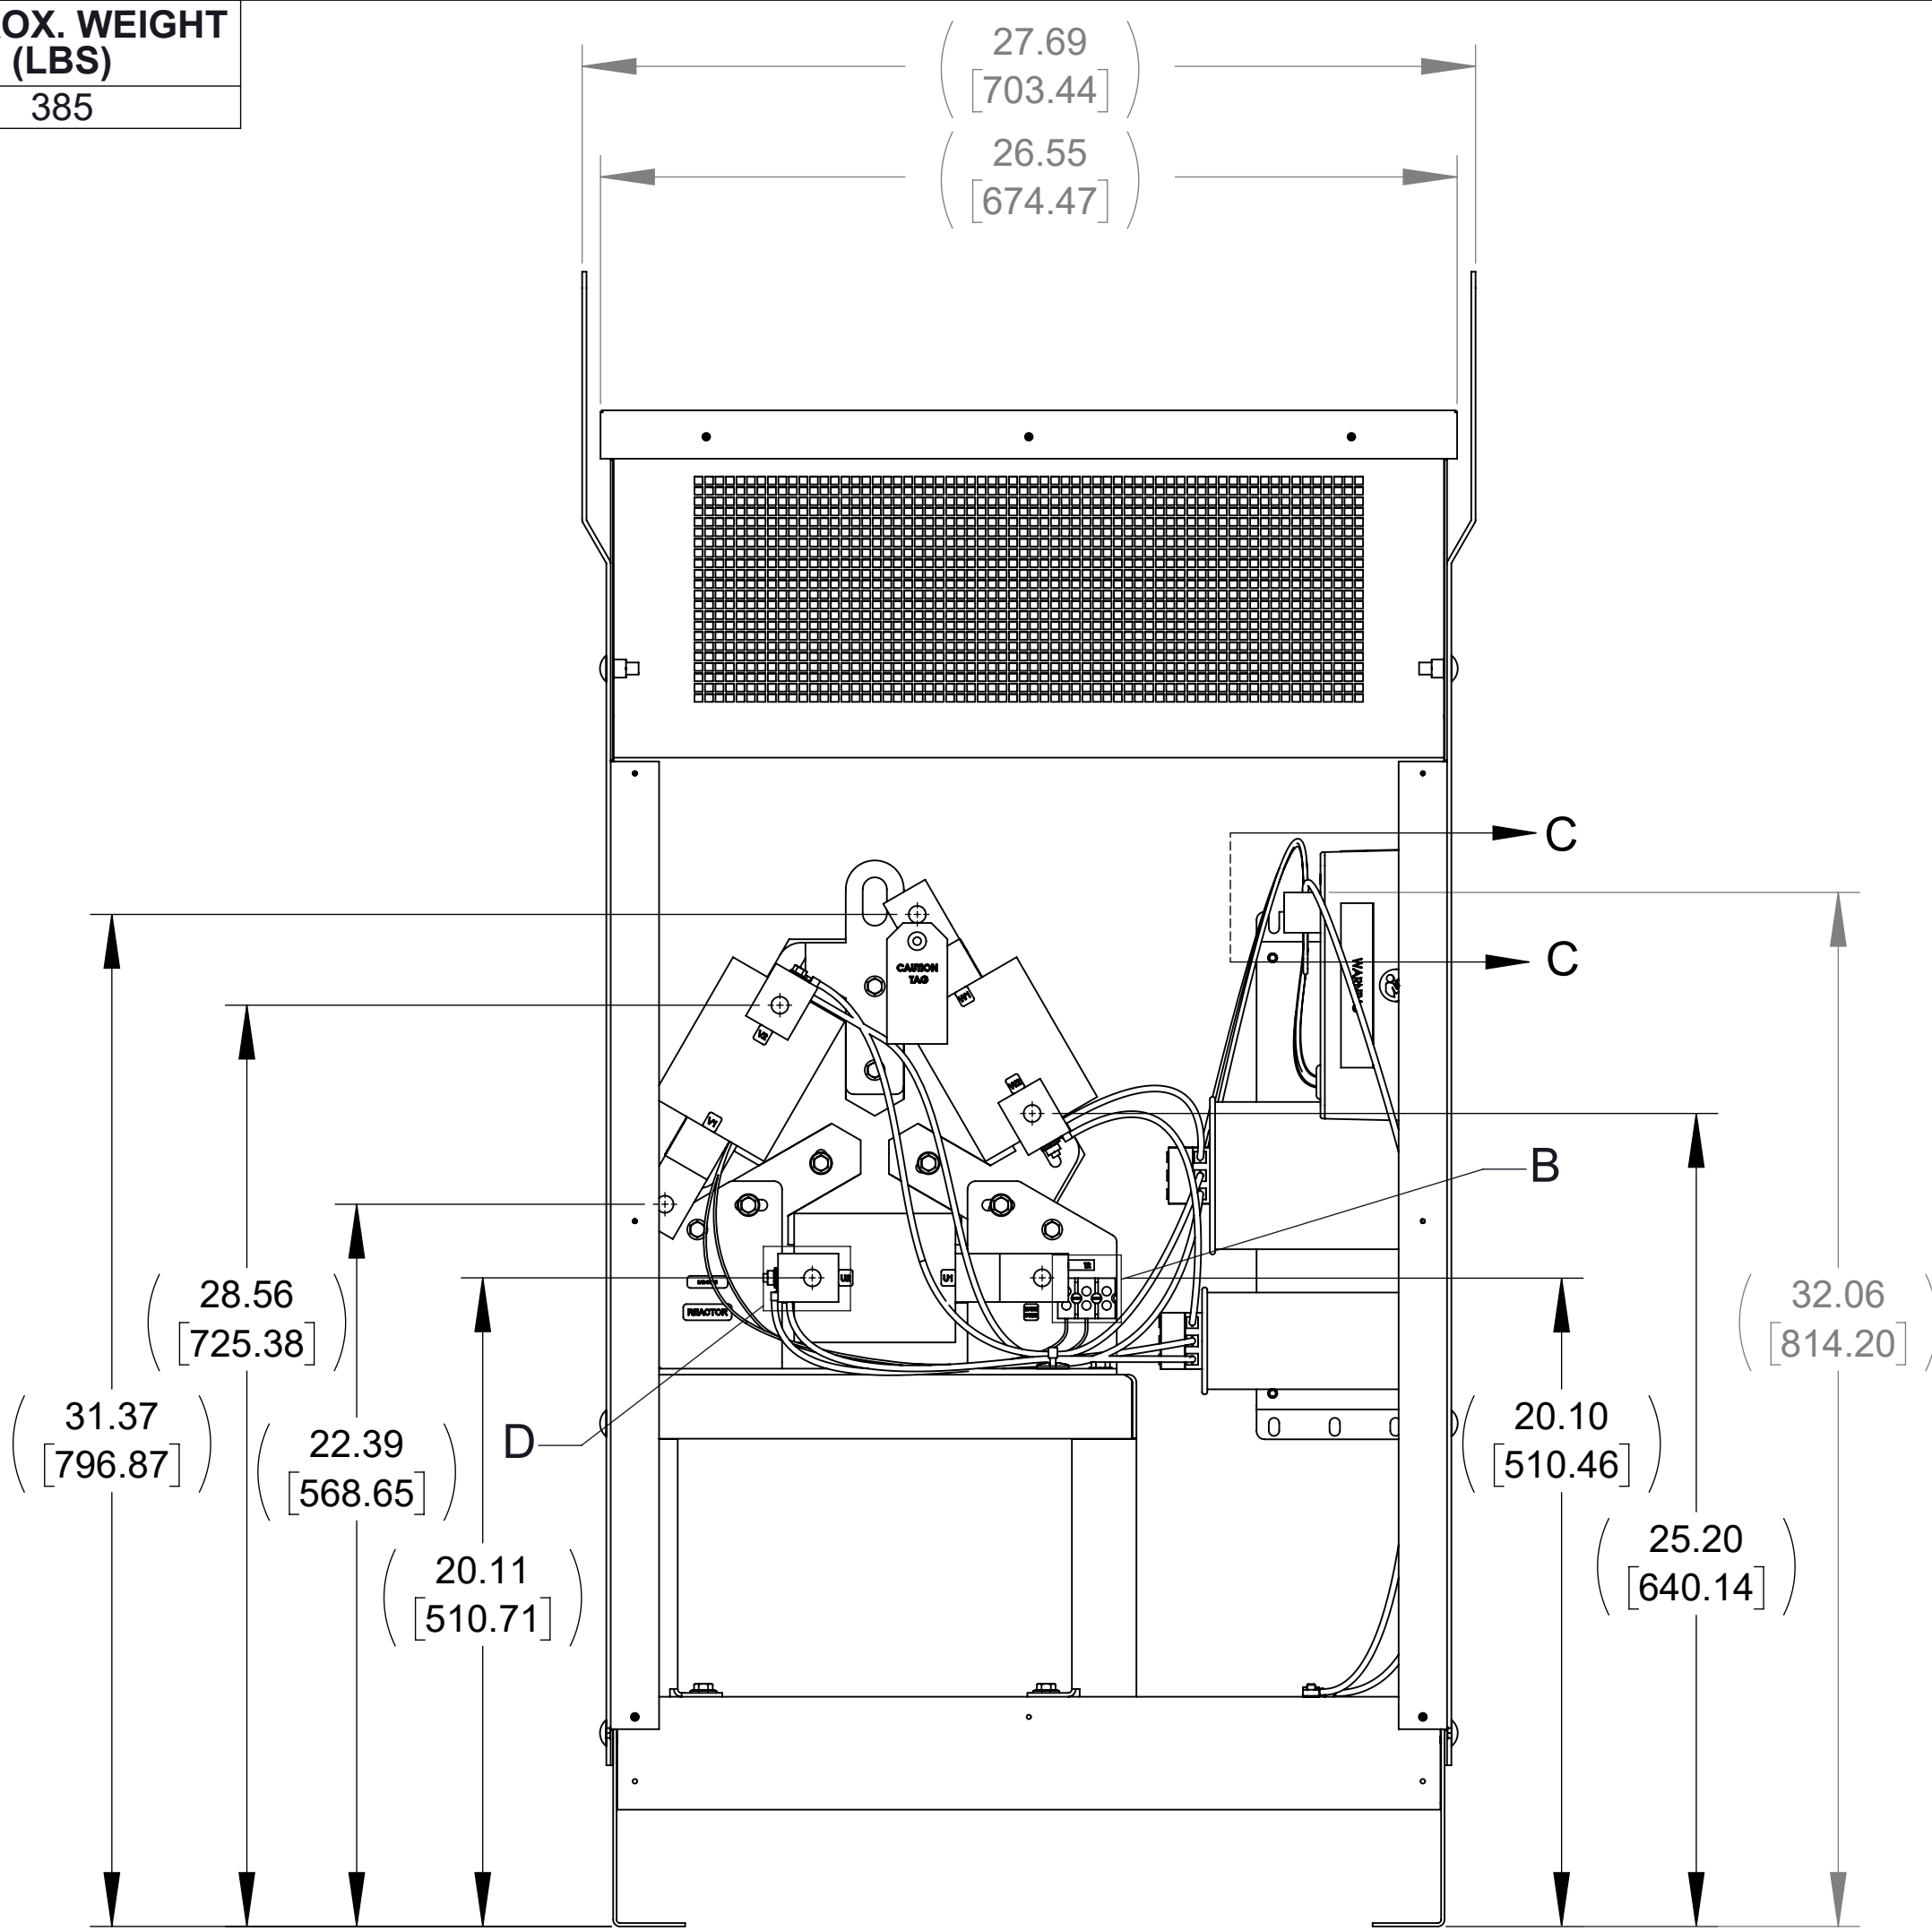


FRONT VIEW
(PANELS REMOVED)

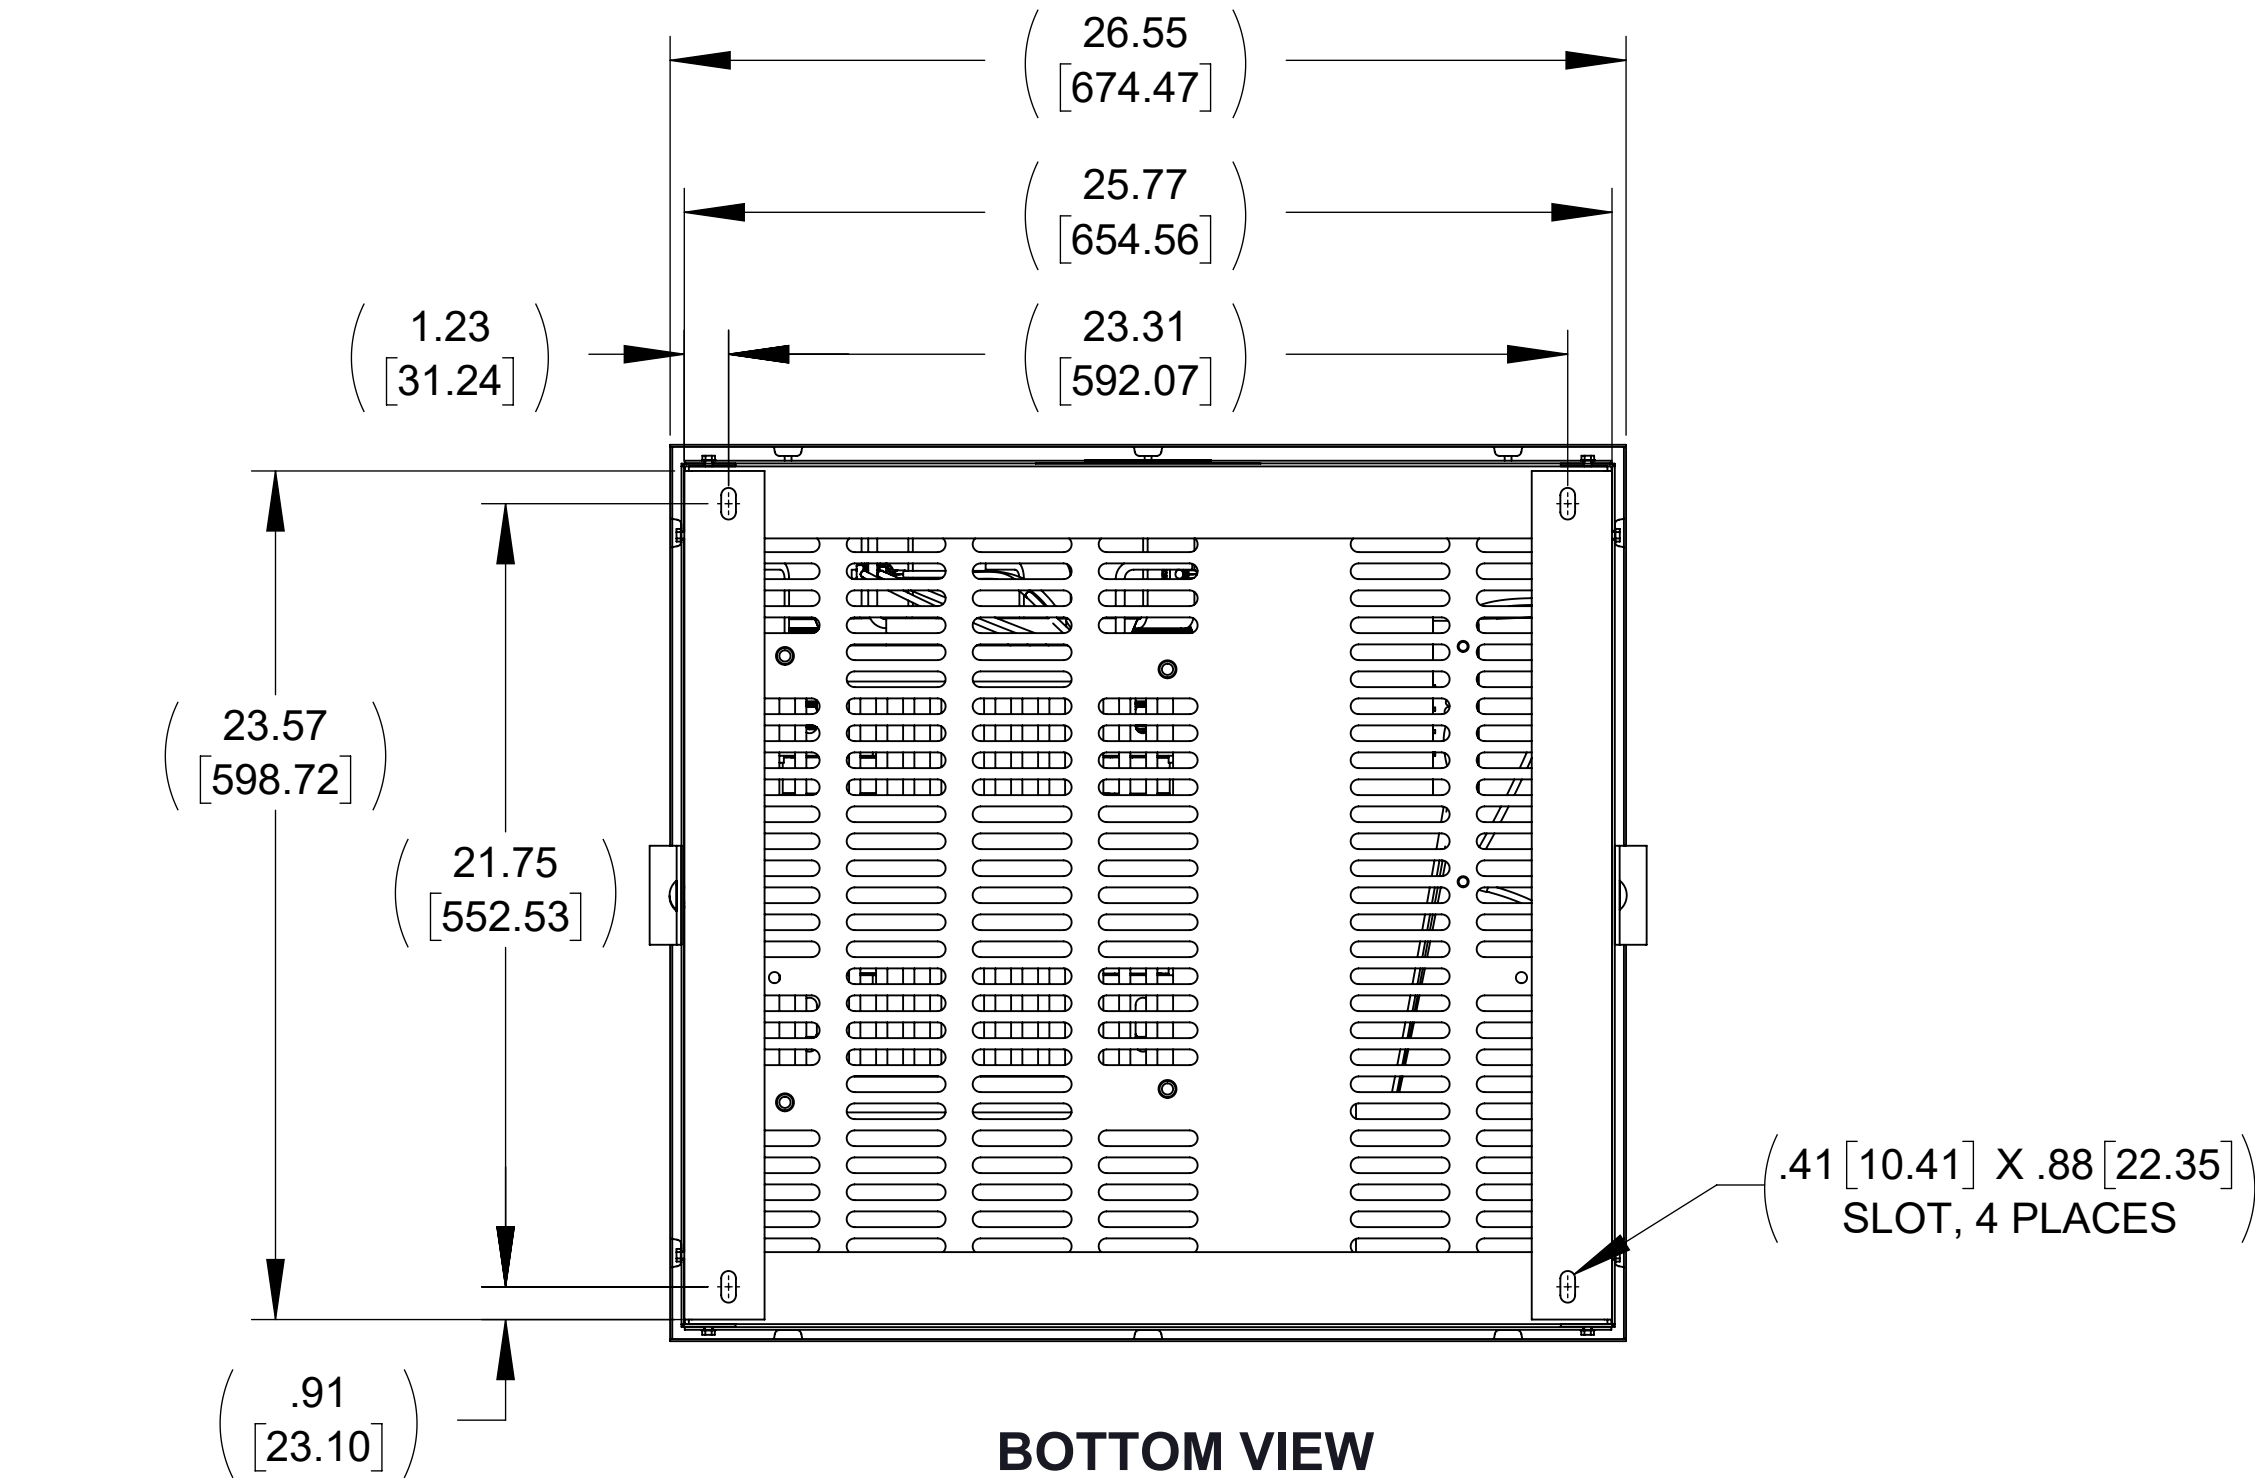


BOTTOM VIEW

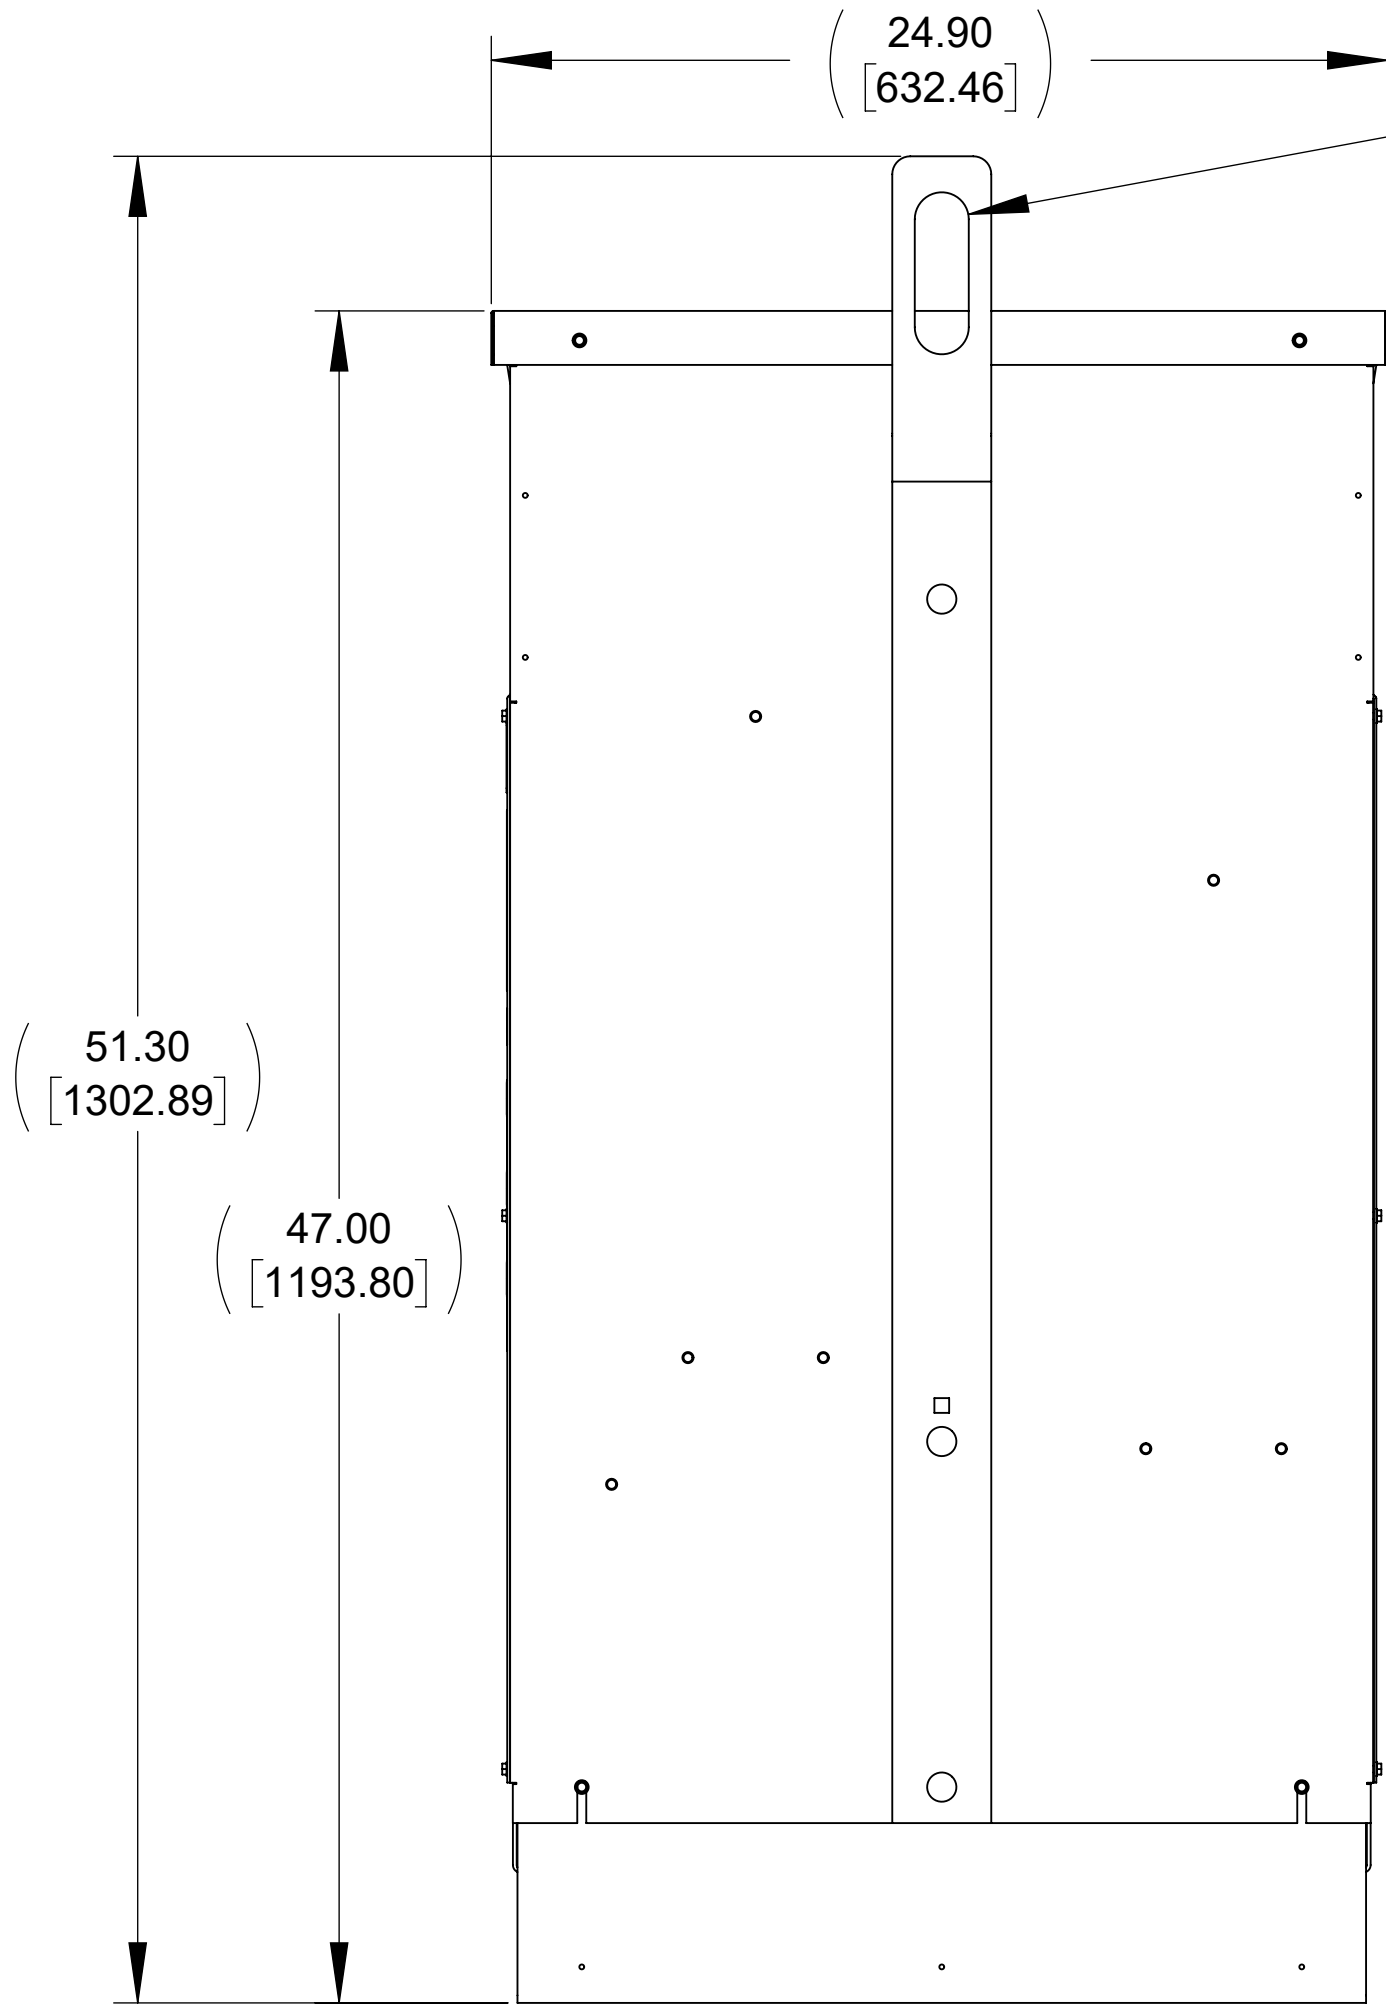


SIDE VIEW

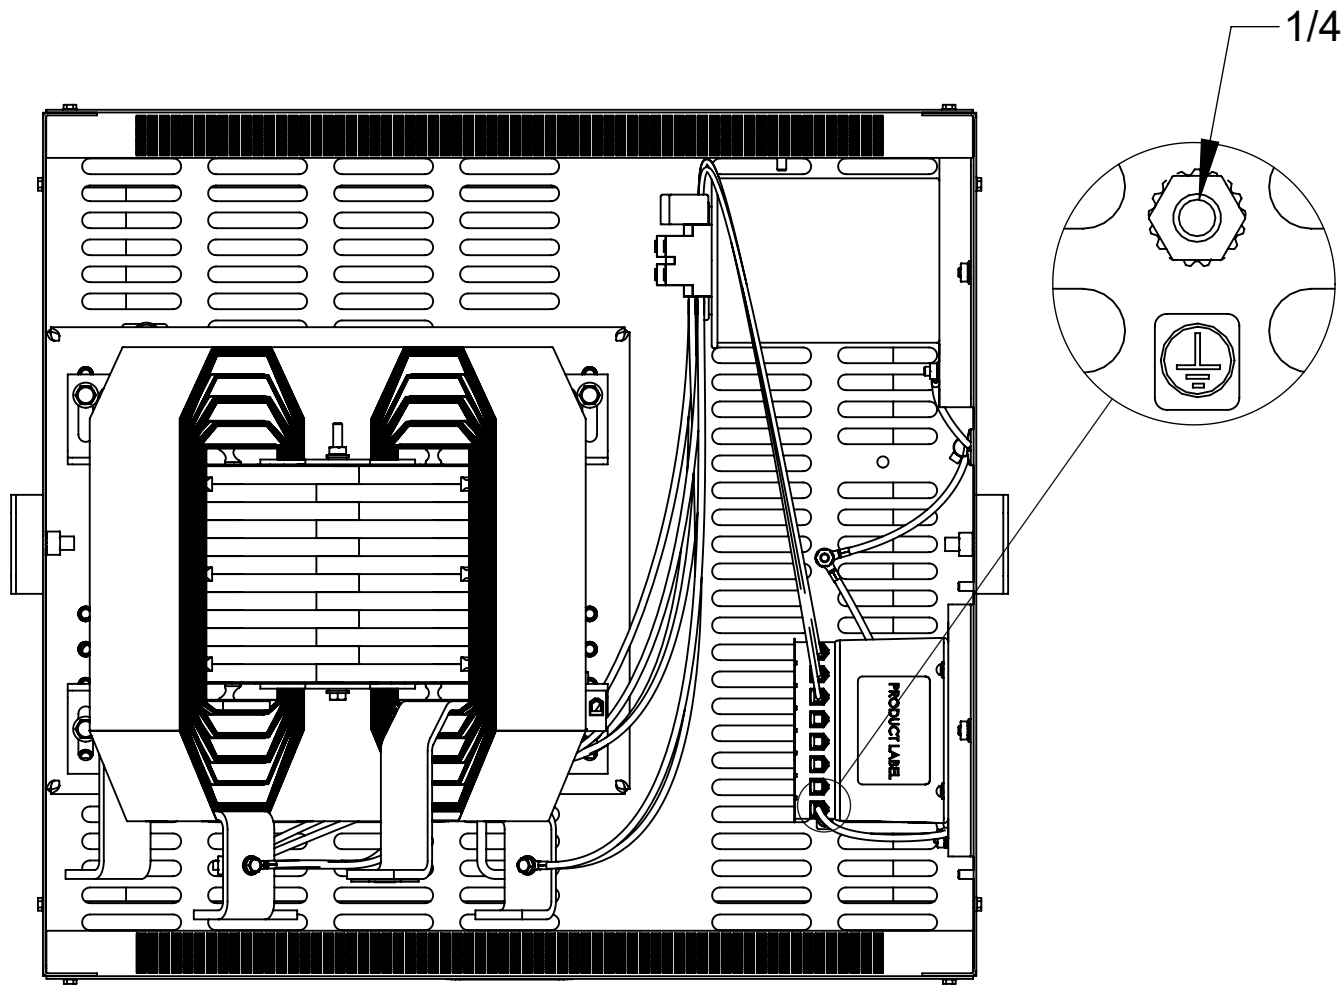


TOP VIEW
(PANELS REMOVED)

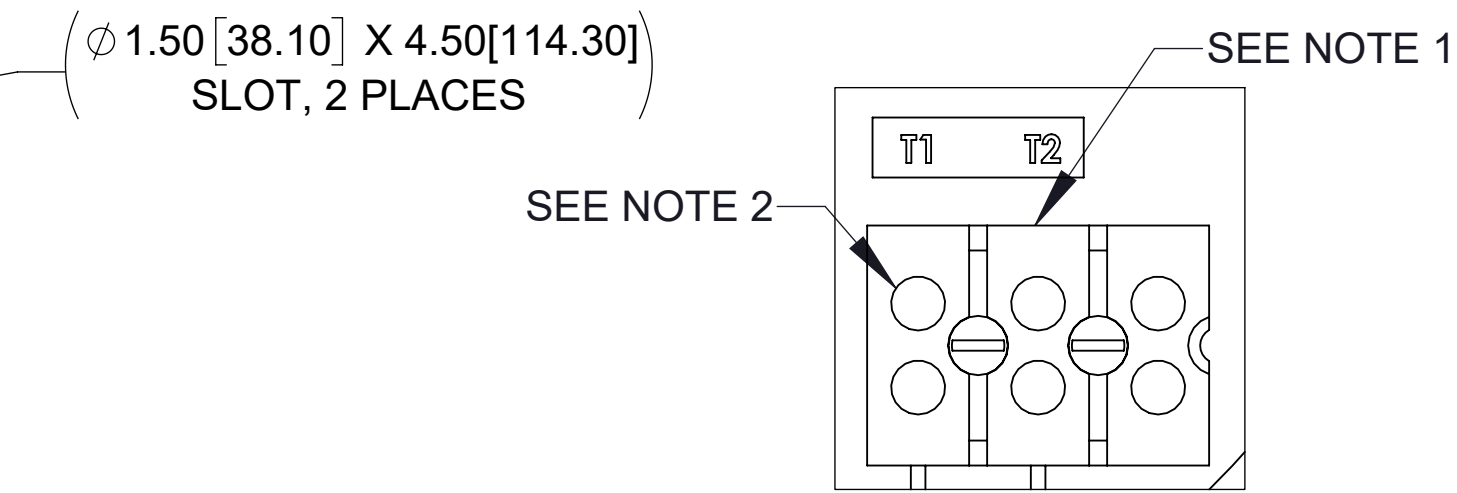

DETAIL B
CUSTOMER CONNECTION
DETAIL VIEW (THERMAL)

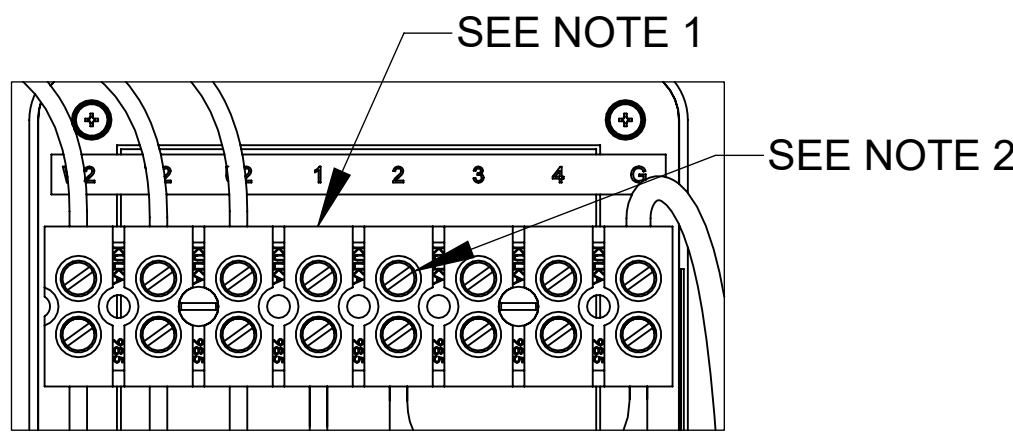

SECTION C-C
CUSTOMER CONNECTION
DETAIL VIEW (GROUND)

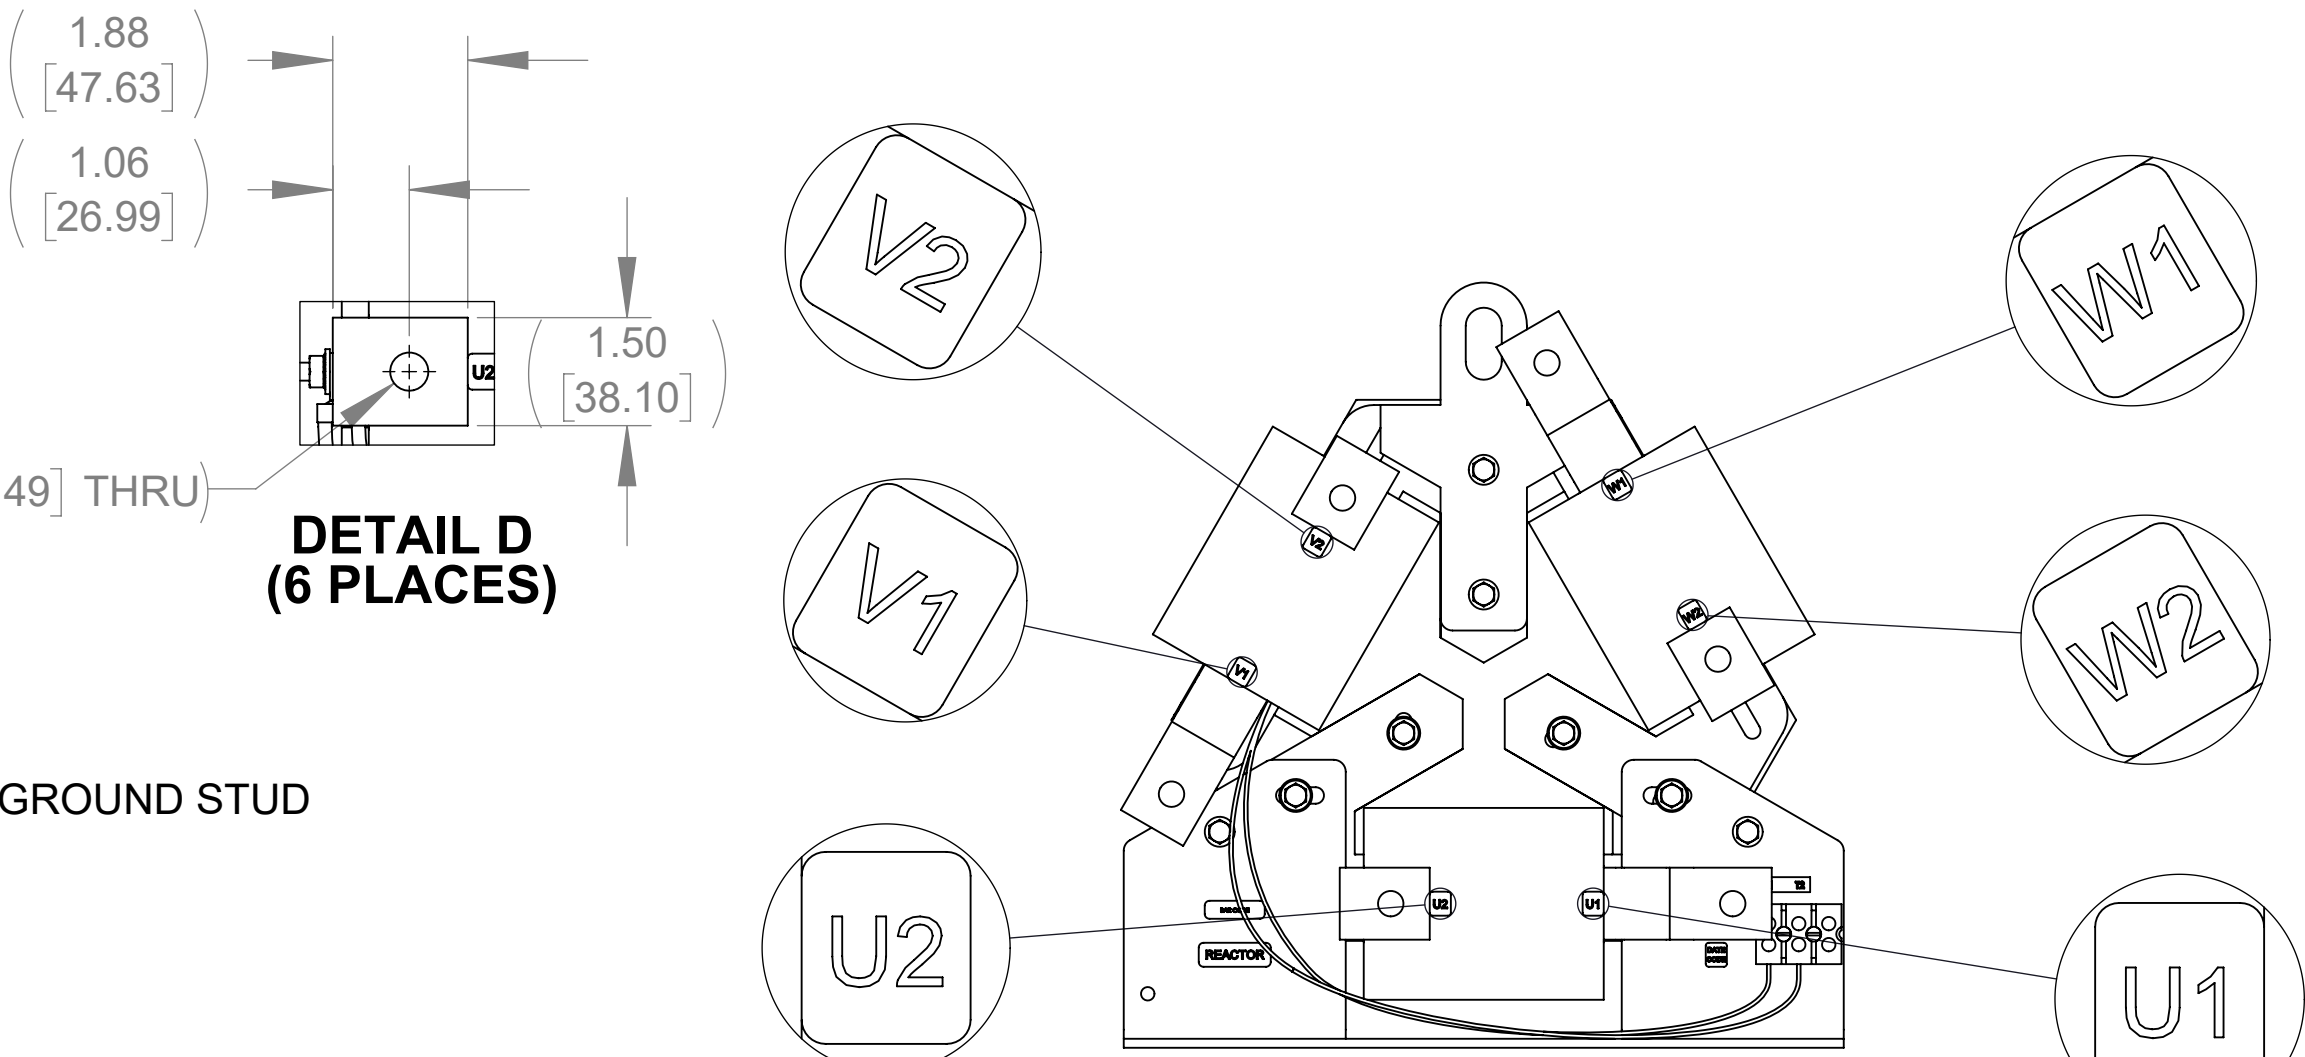

CUSTOMER CONNECTION
DETAIL VIEW

- NOTES:**
1. TERMINAL WIRE RANGE: 4-18 AWG.
 2. TERMINAL SCREW TIGHTENING TORQUE: 16 IN/LBS.
 3. REFER TO USER MANUAL FOR COMPLETE INSTALLATION INSTRUCTIONS

| | | | | | |
|--|--|---|--|--|-------------------------|
| THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU (EUROPEAN UNION) DIRECTIVE RoHS2 | | MATERIAL | | CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION | |
| CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION | | | | DESCRIPTION | |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE: ANGLES: ± 1 ° 1 PLACE .X: ± .1 [2.5] 2 PLACE .XX: ± .03 [0.76] 3 PLACE .XXX: ± .010 [0.254] | | MTE POWER QUALITY. SOLVED. N83 W13330 Leon Road Menomonee Falls, WI 53051 USA 800.455-4683 262.253.8200 | | SINEWAVE NEXUS FILTER 160A 480V 60Hz NEMA 1/2 ENCL | |
| DRAWN MN | | DATE 02/19/19 | | SIZE D | DWG No. CD SWNG0160D |
| CHECKED MN | | DATE 10/24/19 | | SCALE 3:16 | REV 01 |
| APPROVED AK | | DATE 11/19/19 | | SHEET 1 OF 1 | |