



APPROX. WEIGHT (LBS)
28



| ECO No | DESCRIPTION | REV BY | DATE |
|--------|-------------------|--------|----------|
| M12093 | REPLACE CMP W/CMB | MN | 11/19/19 |

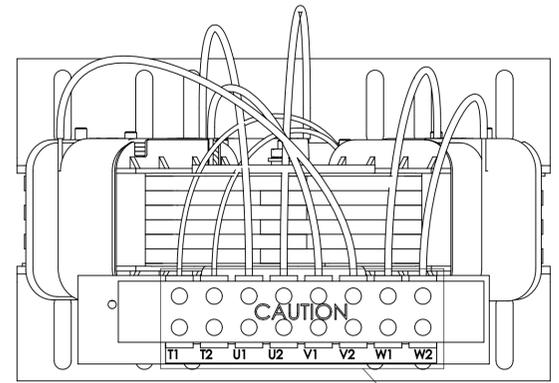

TOP VIEW

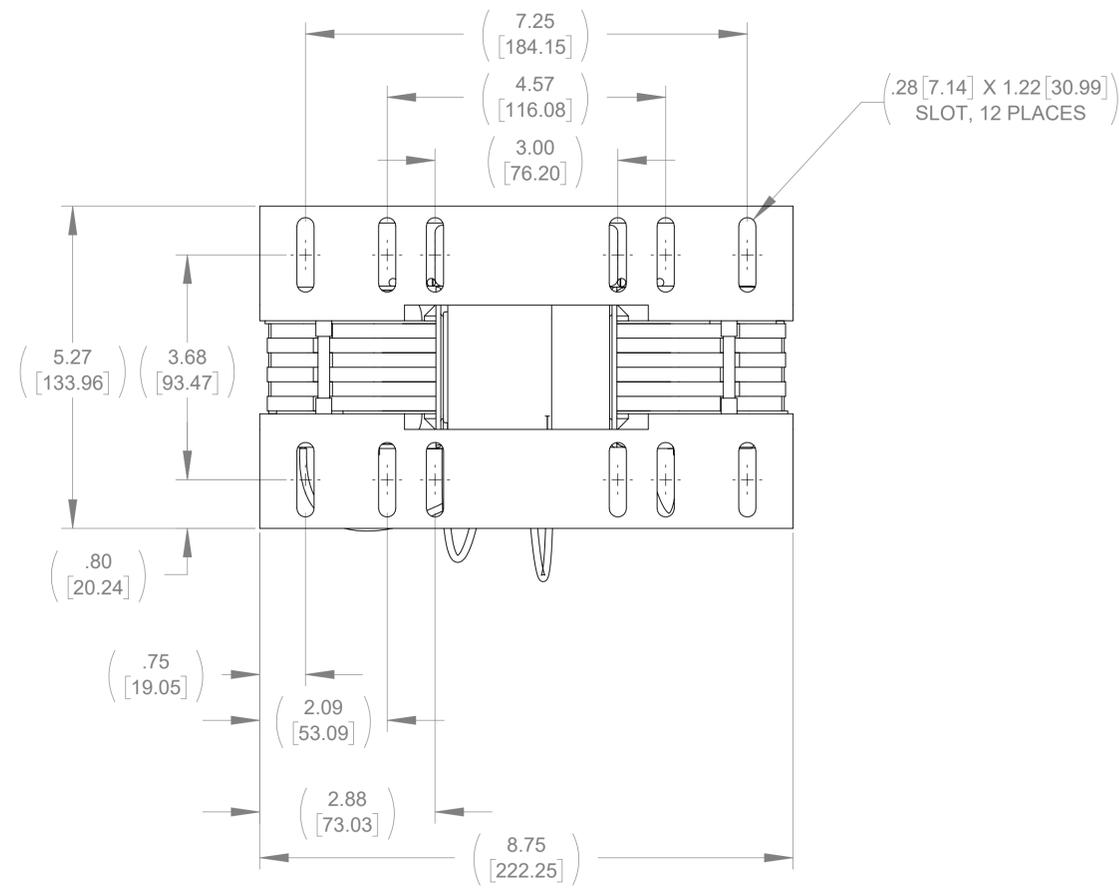


BOTTOM VIEW

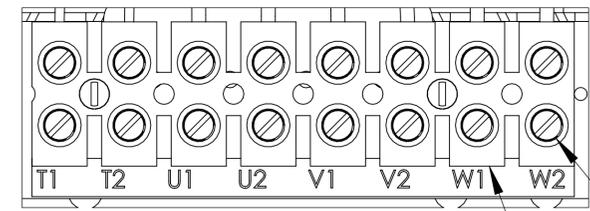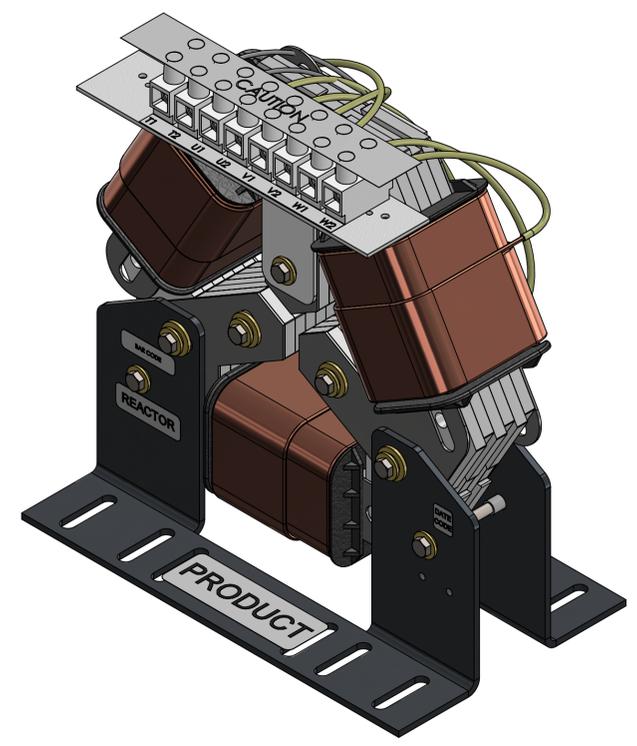


DETAIL A
CUSTOMER CONNECTION
DETAIL VIEW

SEE NOTE 2
SEE NOTE 1

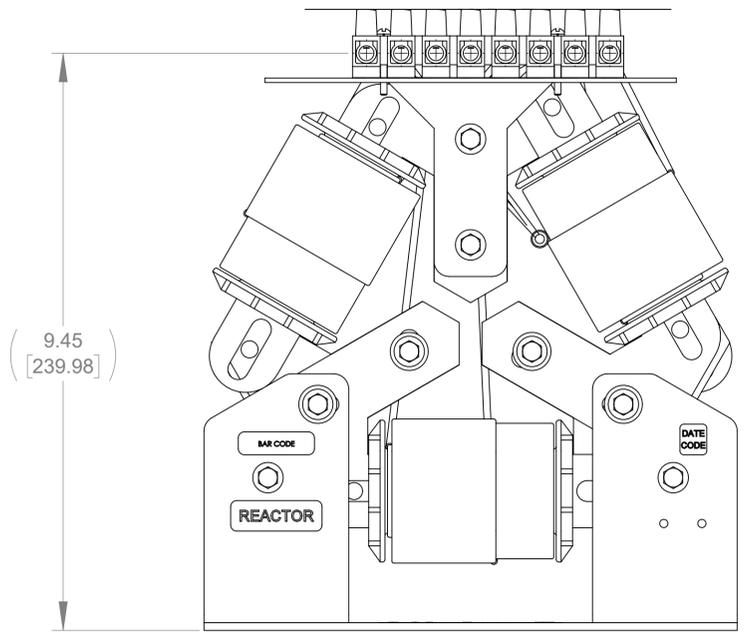

FRONT VIEW

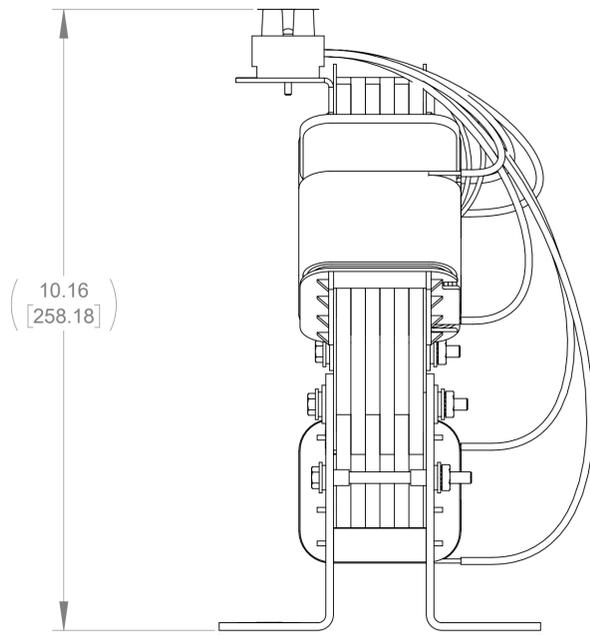

SIDE VIEW

NOTES:

1. TERMINAL WIRE RANGE: 4-14 AWG.
2. TERMINAL SCREW TIGHTENING TORQUE: 16 IN/LBS.
3. REFER TO USER MANUAL FOR COMPLETE INSTALLATION INSTRUCTIONS.
4. FILTER INCLUDES: CAP-518SW (QTY. 1) AND CMB-001(QTY. 1).

| | | | | | |
|--|--|---|--|---|--|
| THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU (EUROPEAN UNION) DIRECTIVE RoHS2 CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION | | MATERIAL DRAWN: MN, DATE: 06/12/19 CHECKED: MN, DATE: 11/19/19 APPROVED: RH, DATE: 11/26/19 | | CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION | |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE: ANGLES: ± 1° 1 PLACE .X: ± .1 [2.5] 2 PLACE .XX: ± .03 [0.76] 3 PLACE .XXX: ± .010 [0.254] | | N83 W13330 Leon Road Menomonee Falls, WI 53051 USA 800.455.4683 262.253.8200 | | DESCRIPTION SINEWAVE NEXUS FILTER 5A 600V 60Hz OPEN PANEL | |
| | | | | SIZE: D SCALE: 2:3 | DWG No.: CD SWNM0005E REV: 01 SHEET 1 OF 1 |