APPROX. WEIGHT (LBS)
2

ECO No	DESCRIPTION	REV BY	DATE
M12106	CHANGE FROM 6 TO 8 POLE TERMBLK	MN	11/05/19

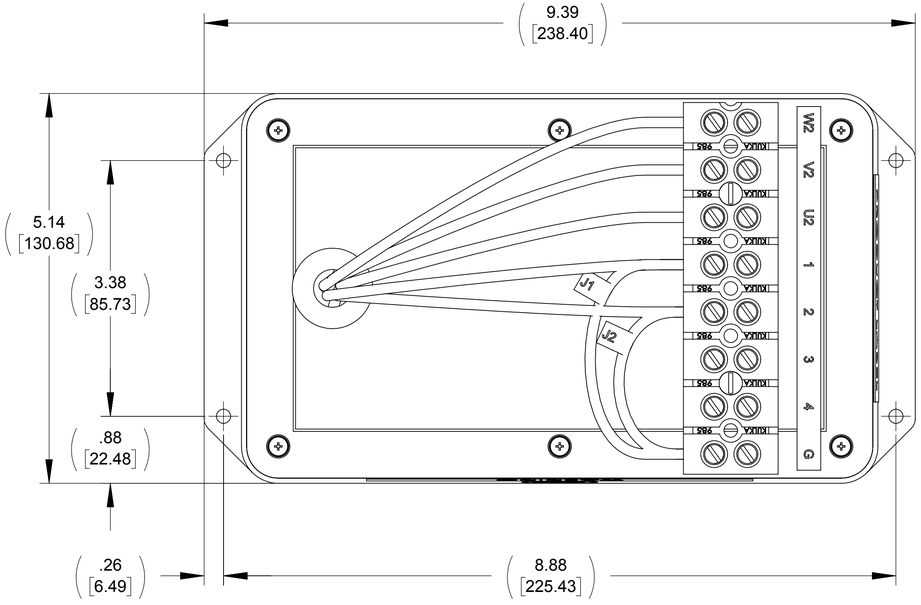

TOP VIEW

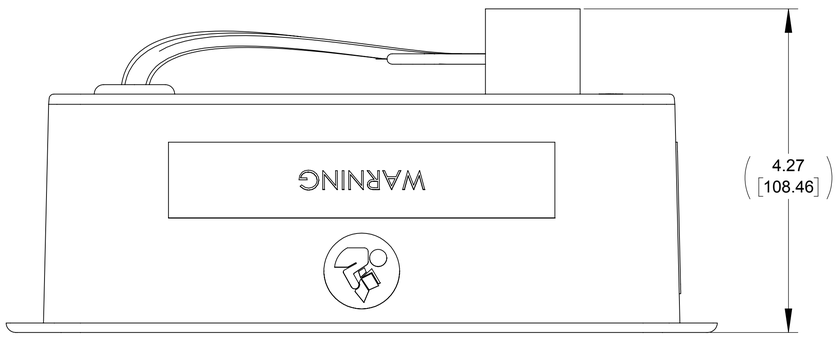

FRONT VIEW

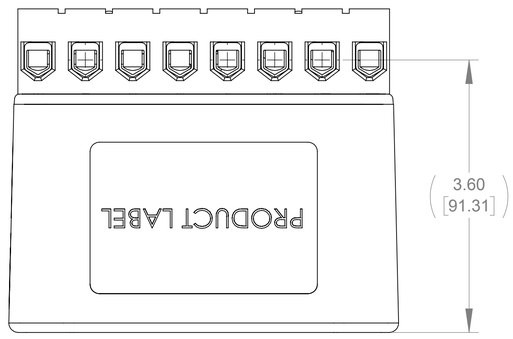

SIDE VIEW

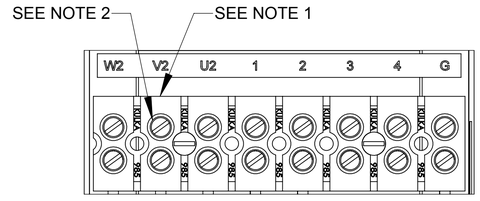

CUSTOMER CONNECTION DETAIL VIEW

NOTES:

1. TERMINAL WIRE RANGE: 4-18 AWG.
2. TERMINAL SCREW TIGHTENING TORQUE: 16 IN\LBS.
3. REFER TO USER MANUAL FOR COMPLETE INSTALLATION INSTRUCTIONS.

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU(EUROPEAN UNION) DIRECTIVE RoHS2

CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE:

ANGLES: ± 1 °

1 PLACE .X: ± .1 [2.5]

2 PLACE .XX: ± .03 [0.76]

3 PLACE .XXX: ± .010 [0.254]

MTE POWER QUALITY. SOLVED.

N83 W13330 Leon Road
Menomonee Falls, WI 53051 USA
800.455-4683
262.253.8200

MATERIAL

DRAWN	DATE
MN	10/22/19
CHECKED	DATE
MN	11/05/19
APPROVED	DATE
AK	11/19/19

CONFIDENTIAL AND PROPRIETARY INFORMATION
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION

DESCRIPTION

COMMON MODE BOX
6.54uF

SIZE	DWG No.	REV
D	CD CMB-009	01

SCALE 1:1 SHEET 1 OF 1