



APPROX. WEIGHT (LBS)	APPROX. WEIGHT (LBS)
291	727

ECO No	DESCRIPTION	REV BY	DATE
M14998	UPDATED DESCRIPTION, ADDED WATTS LOSS	MK	07/24/23

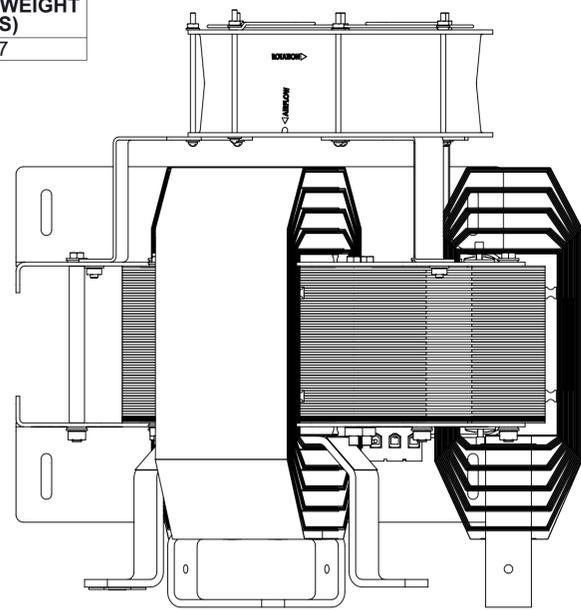


TOP VIEW


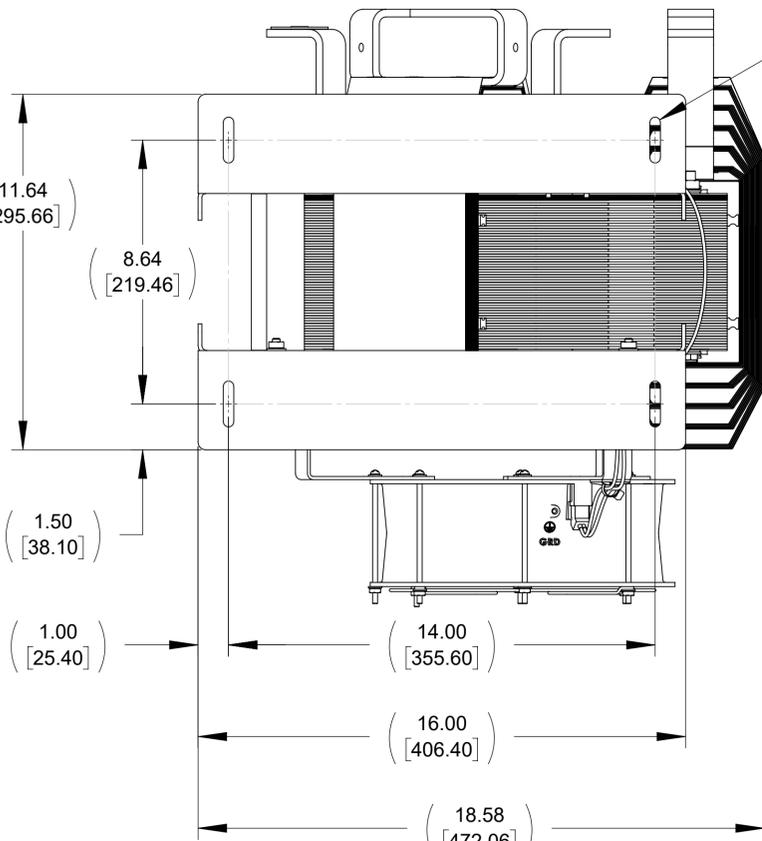


BOTTOM VIEW


.34 [8.73] X 1.50 [38.10]  
SLOT, 4 PLACES




DETAIL C  
CUSTOMER CONNECTION  
DETAIL VIEW  
(THERMAL & FAN)

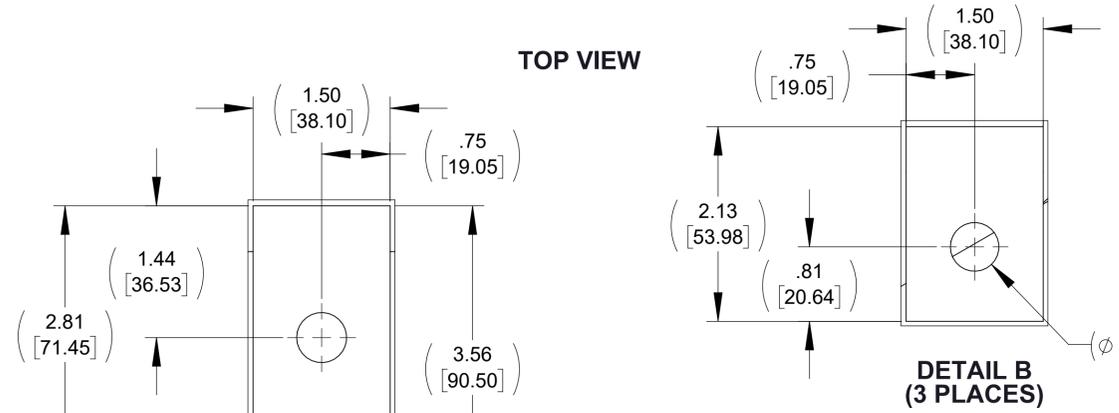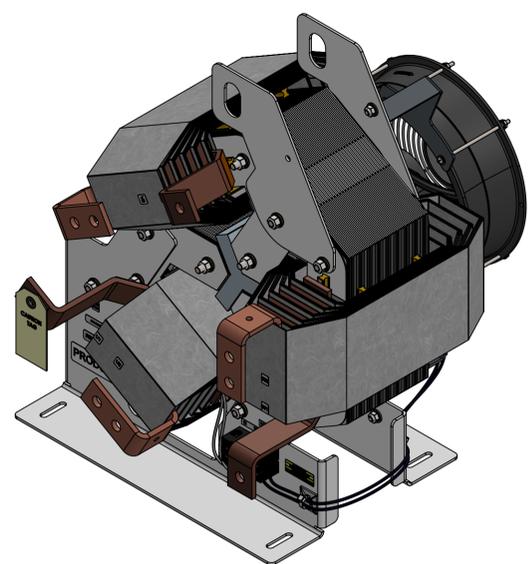


DETAIL A  
(3 PLACES)

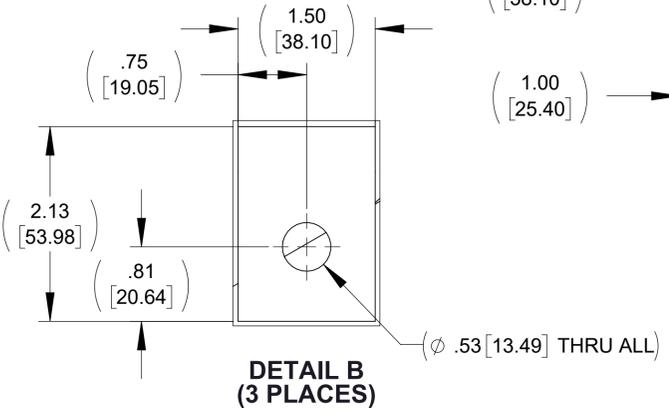


DETAIL B  
(3 PLACES)

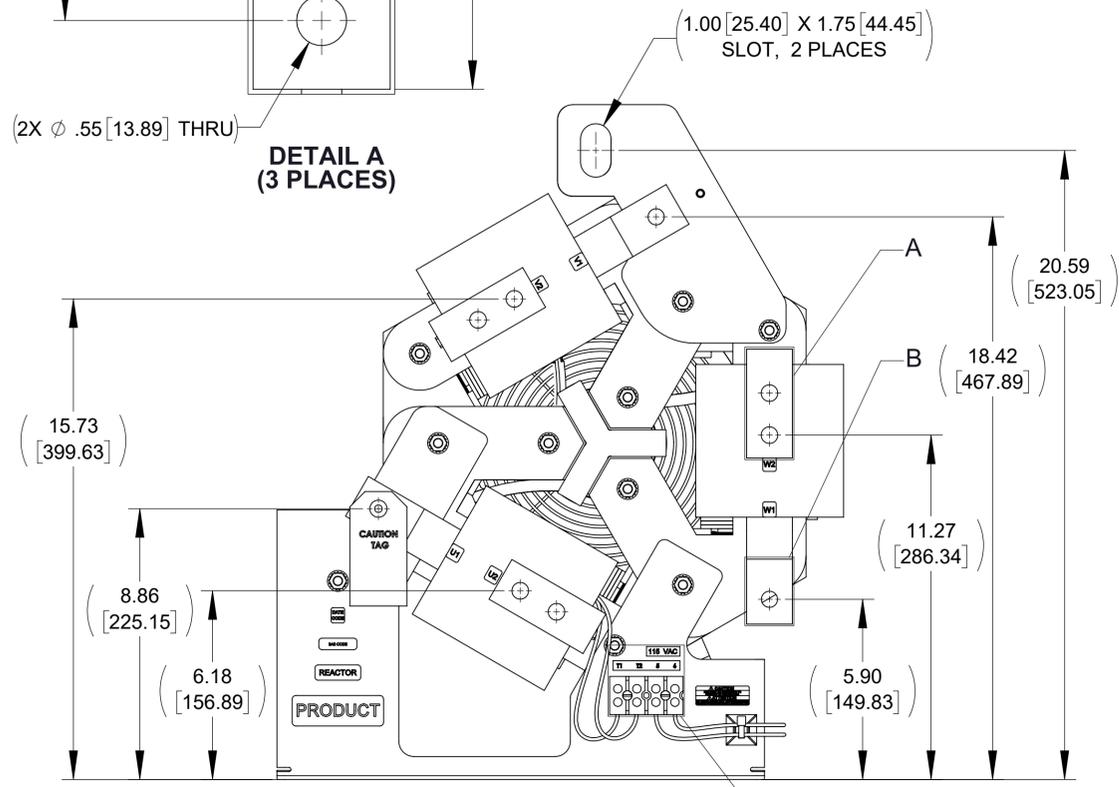

FRONT VIEW

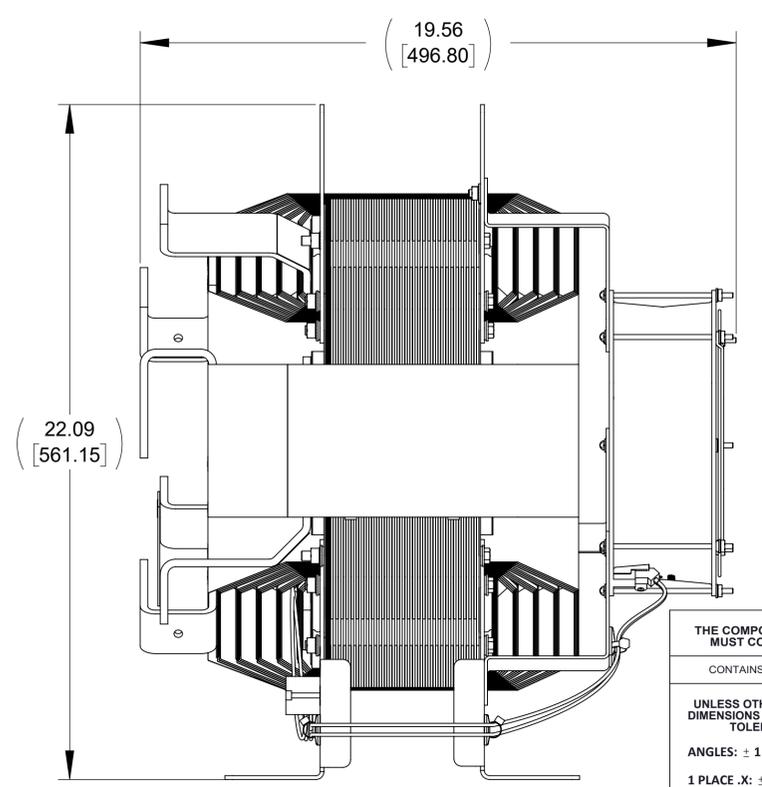

SIDE VIEW

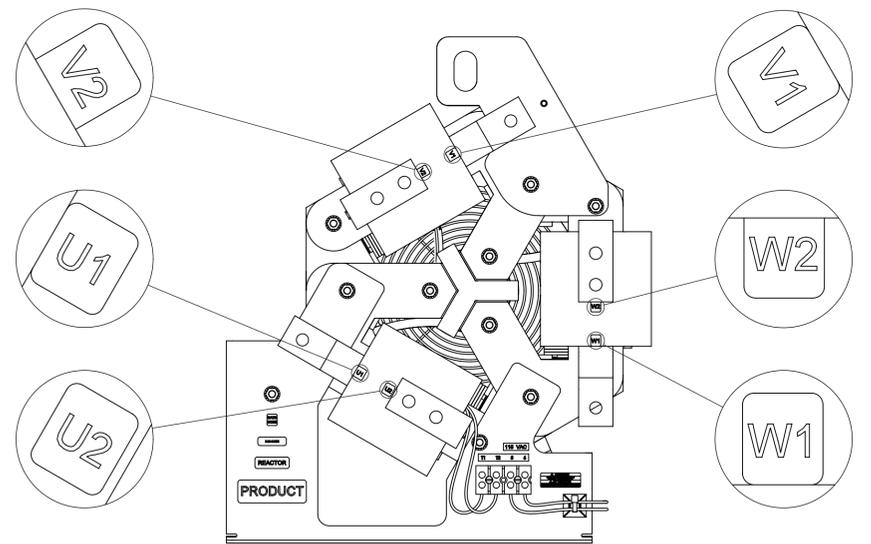

CUSTOMER CONNECTION  
DETAIL VIEW

NOTES:

1. TERMINAL WIRE RANGE: 4-18 AWG.
2. TERMINAL SCREW TIGHTENING TORQUE: 16 IN/LBS.
3. REFER TO USER MANUAL FOR COMPLETE INSTALLATION INSTRUCTIONS.
4. FILTER INCLUDES: CAPPANEL-608C (QTY. 1) AND CMB-015 (QTY. 1).

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU (EUROPEAN UNION) DIRECTIVE ROHS2		DRAWN BY: KV		DATE: 05/18/21		CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION	
CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION		CHECKED BY: MK		DATE: 07/24/23			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE:		ME APPROVED BY:		DATE:		DESCRIPTION <b>SINEWAVE NEXUS FILTER</b> 200A 380-480V 50/60Hz OPEN PANEL	
ANGLES: ± 1°		RE APPROVED BY: GV		DATE: 07/31/23			
1 PLACE .X: ± .1 [2.5]		MTE		N83W12650 Stratton Cir - Suite 100 Menomonee Falls, WI 53051 USA 900.455-4683 262.253.8200		SIZE: D	
2 PLACE .XX: ± .03 [0.76]		POWER QUALITY. SOLVED.		A STEEL PARTNERS COMPANY		DWG No. CD SWNM0200D	
3 PLACE .XXX: ± .010 [0.254]						REV: 02	
						SCALE: 1:3	
						Sheet1	
						SHEET 1 OF 1	